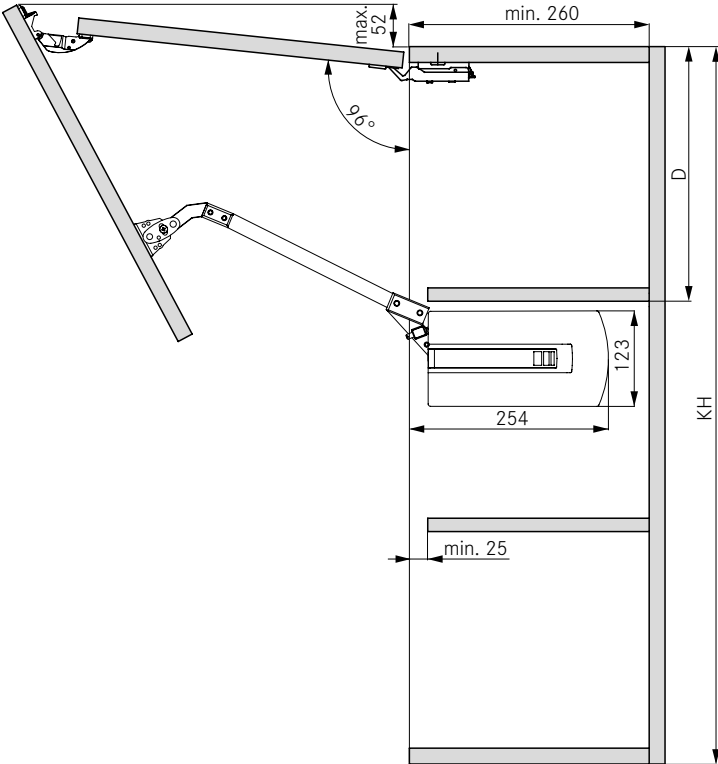
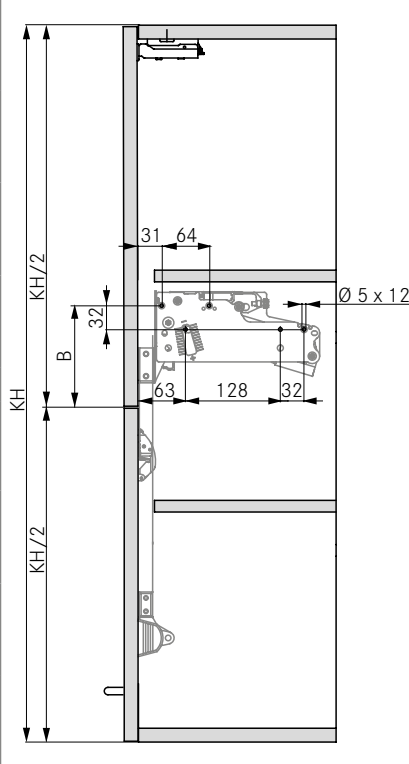
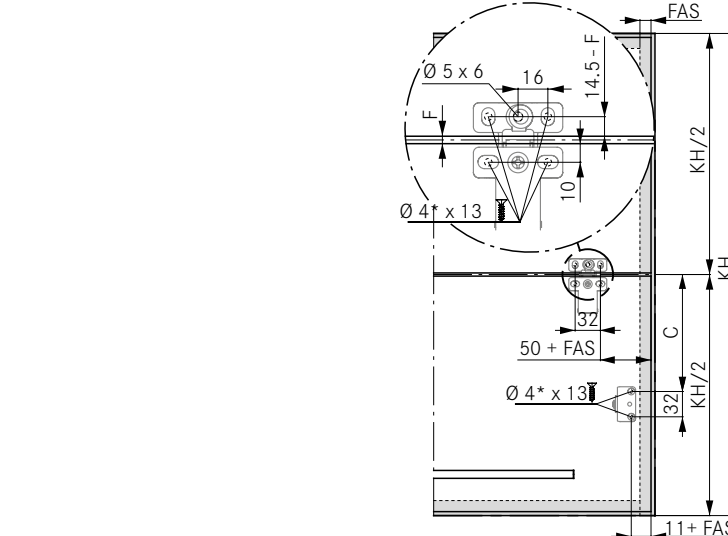



KINVARO

F-20 folding flap fitting

Required space		Side wall drilling positions		Side wall Drilling clearance		
				KH	Type	B
				800 - 849	7	103
				850 - 900	7	110
				Shelf distance		
				KH	D	
				800 - 849	≤293	
				850 - 900	≤312	
Front installation for wooden and frame flaps (min. 45 mm width)				Front Drilling clearance		
				KH	Type	C
				800 - 900	7	304
				Number of hinges on top panel		
				From 900 mm cabinet width: 3 hinges. Hinges with spring require an opening angle of min. 120°		
Calculation of flap weight						
Flap width x flap height x flap thickness x density ¹ + weight of handle ² = weight of flap						
¹ Densities: MDF board 0.85 kg/dm ³ , chipboard 0.65 kg/dm ³ , spruce/pine 0.45 kg/dm ³						
² For bar handles, allow 0.1 kg per 100 mm of the handle length. We recommend a trial fitting						

PAGE REFERENCES

Kinvaro F-20 adjustment options	78				
Assembly aids	88				