



# BASE PULL-OUT PLUS - 150mm

Assembly and fitting instructions


**!** **IMPORTANT** - The unit has a maximum loading limit of 20kg. All fixings supplied must be used for installation.

## Parts

- A** x4 M6 x 12mm screw
- B** x12 3.5 x 16mm countersunk screw
- C** x2 M4 x 6mm screw

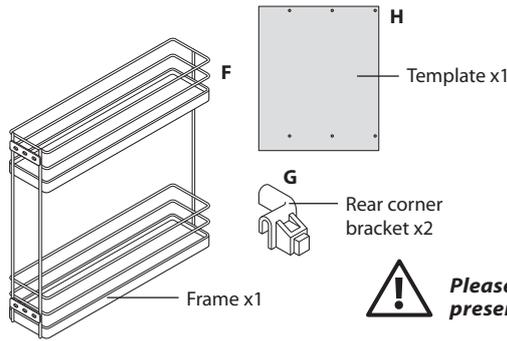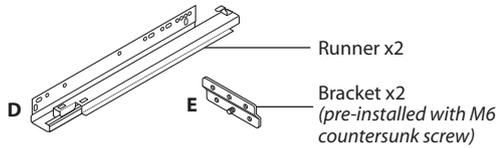


## Tools required




**!** Please ensure that all the above fittings are present before installation begins.


### 1 Fit runners to left hand side of cabinet.

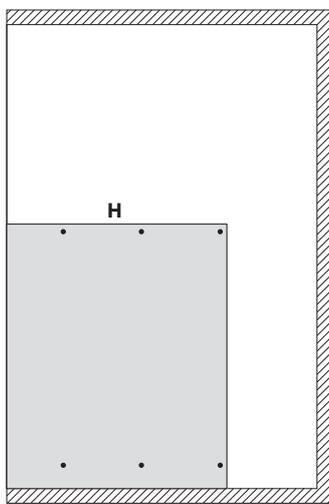


We recommend this operation is carried out before cabinet carcass is assembled.

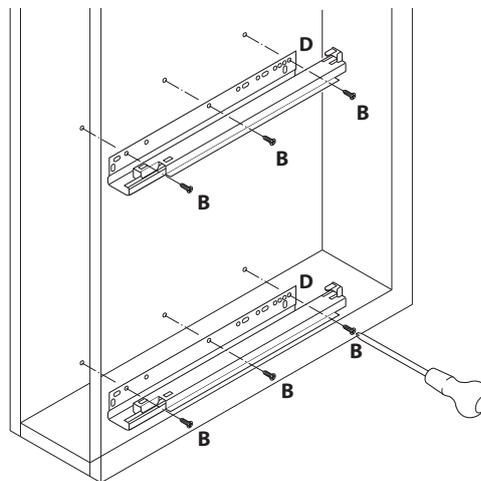


### 2 Fit rear corner brackets to frame.

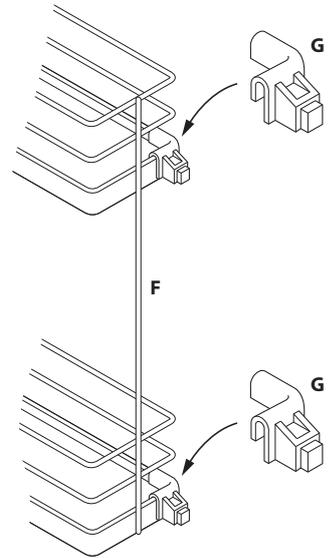

### 3 Fit frame to runners.

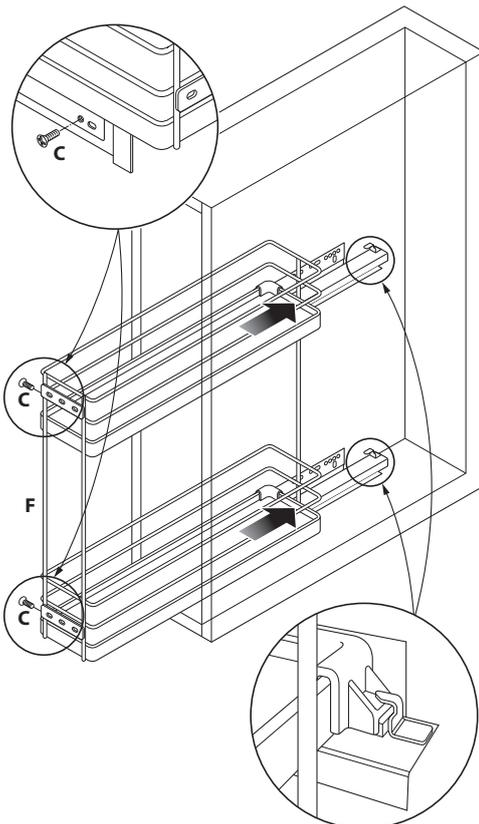

### 4 Secure brackets to inside face of door.

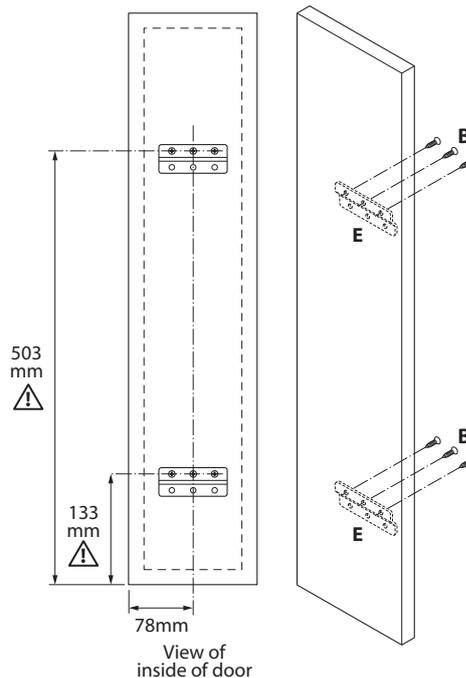

**!** **IMPORTANT:**  
Door dimensions and fitting heights can vary. Adjust accordingly.

### 5 Fit door to frame.

