

UNDERMOUNT SLIDE SERIES

MAGIC-MOVE



MAGIC-MOVE

Soft-close, synchronization, silent system
**Perfect Motion for
Drawers**



- DTC Magic-Move Soft-close Undermount Slides, full extension with integrated synchronization silent system.
- 3D adjustment - First Choice for Quality kitchen cabinets and wardrobes.
- Dynamic Loading Capacity: 40/60kg



Quietness



Intelligence



Durability



Eco-Friendliness



MAGIC-MOVE offers more options for furniture design and brings the smooth and silent running action through synchronized full extension design, to enable beautiful and fashionable.

DTC
Global Quality Benchmark

UNDERMOUNT SLIDE SERIES MAGIC-MOVE



MAGIC-MOVE undermount slides are suited for various drawer sizes and enable a soft and effortless experience.



Dynamic load capacities of 40kg and 60kg as well as soft-close, push-open and soft-close +push-open functions offer a range of configurations for any application.

DTC
Global Quality Benchmark

UNDERMOUNT SLIDE SERIES MAGIC-MOVE



MAGIC-MOVE integrates synchronized motion which ensures effortless running action making it the preferred choice for high-quality furniture. Full extension makes the entire drawer easy to access.

MAGIC-MOVE

TS10 Series Synchronized Full Extension Undermount Slides with Locking Device




PRODUCT




DESCRIPTION

- Load capacity: 40kg
- Finish: zinc plated
- Length: 250-600mm, full extension
- Silent system guarantees smooth run without noise
- 2D adjustment, up&down: 0-2.5mm, side: ± 1.5 mm
- 3D adjustment, up&down: 0-2.5mm, side: ± 1.5 mm, depth: 0-3mm
- Maximum drawer side thickness: 16mm

SPACE REQUIREMENT

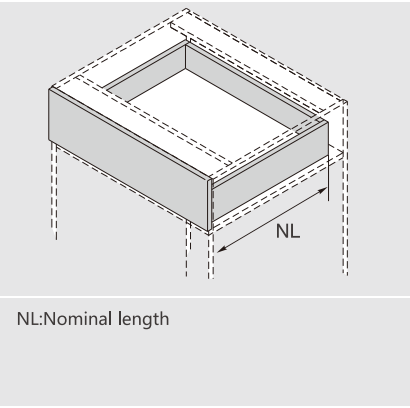

PLANNING

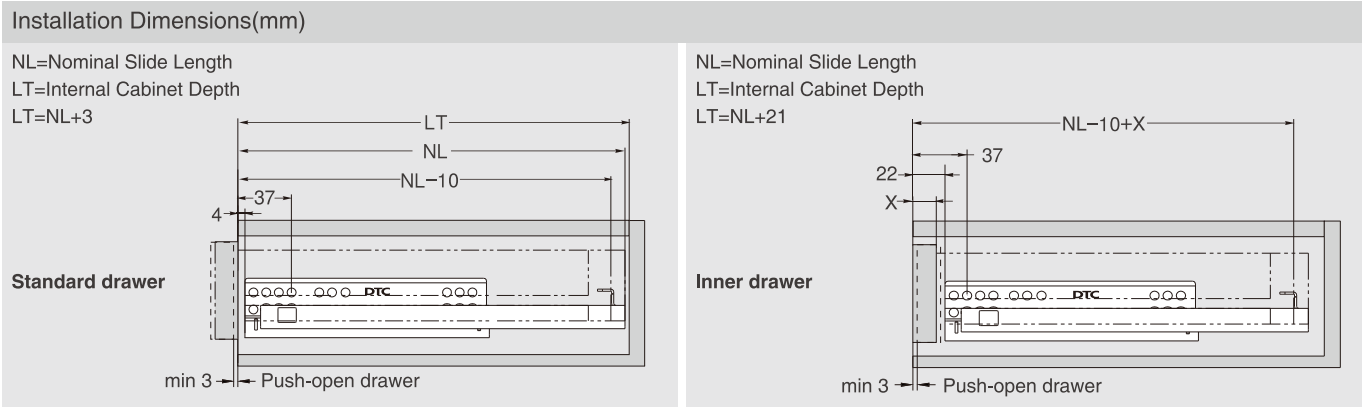

SOFT CLOSE DRAWER/PUSH-OPEN DRAWER/SOFT CLOSE&PUSH-OPEN DRAWER

1










Slides (left/right)

Pre-zinc Steel (F02)

NL	 Soft close item No.	Set/ctn	 Push-open item No.	Set/ctn	 Soft Close+ Push-open item No.	Set/ctn
250mm	TS10250H	10	TF10250H	6		
270mm	TS10270H	10	TF10270H	6		
300mm	TS10300H	10	TF10300H	6		
350mm	TS10350H	10	TF10350H	6	FTS10350H	6
400mm	TS10400H	10	TF10400H	6	FTS10400H	6
450mm	TS10450H	10	TF10450H	6	FTS10450H	6
500mm	TS10500H	10	TF10500H	6	FTS10500H	6
550mm	TS10550H	10	TF10550H	6	FTS10550H	6
600mm	TS10600H	10	TF10600H	6	FTS10600H	6

2D Locking Device (Left/Right)	
Dark Grey(H11)	
Item No.	0TSD01-A
3D Locking Device (Left/Right)	
Dark Grey(H11)	
Item No.	0TSD02-A
Rod for Push-open Synchronization (For cutting to size, 1100mm. Cutting: Internal cabinet width LW-172)	
Item No.	HT0FH02

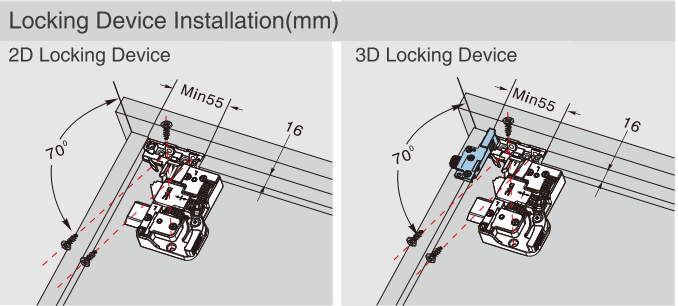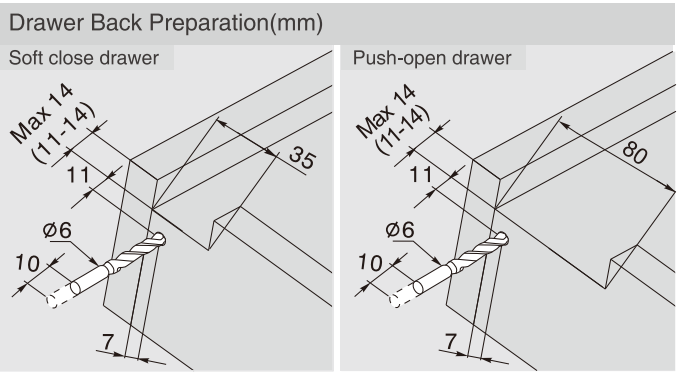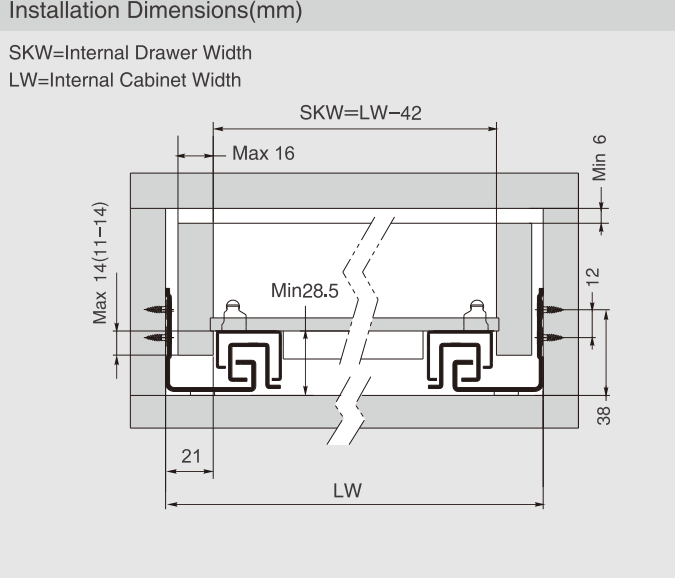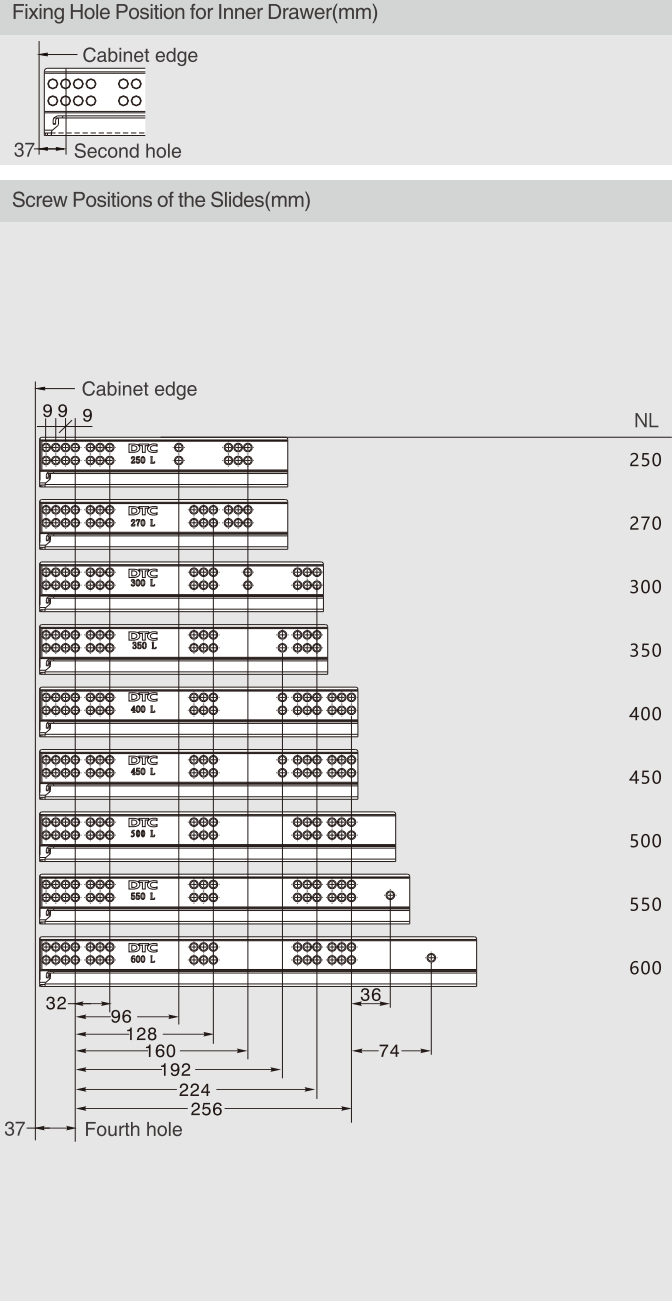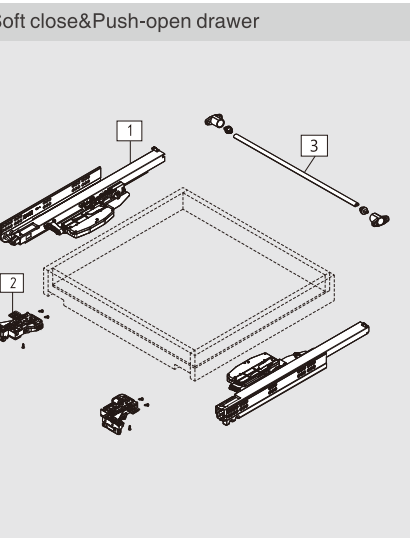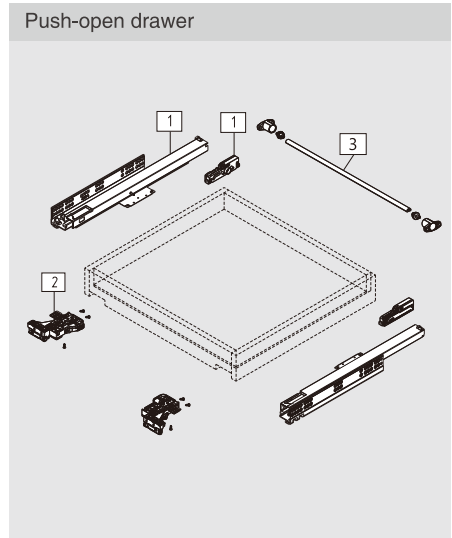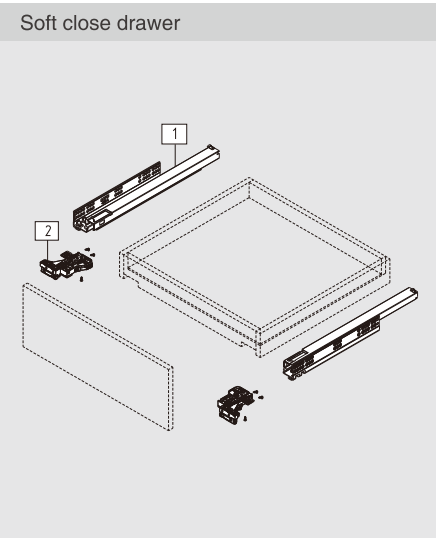

MAGIC-MOVE

TS80 Series Synchronized Series Full Extension Undermount Slides with Locking Device




PRODUCT




DESCRIPTION

- Load capacity: 40kg
- Finish: zinc plated
- Length: 250-600mm, full extension
- Silent system guarantees smooth run without noise
- 2D adjustment, up&down:0-2.5mm, side:± 1.5mm
- 3D adjustment, up&down:0-2.5mm, side:± 1.5mm, depth: 0-3mm
- Maximum drawer side thickness:19mm

SPACE REQUIREMENT

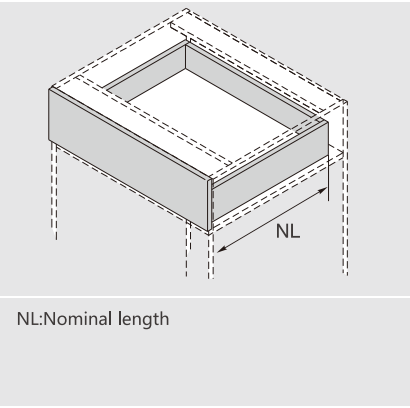

PLANNING

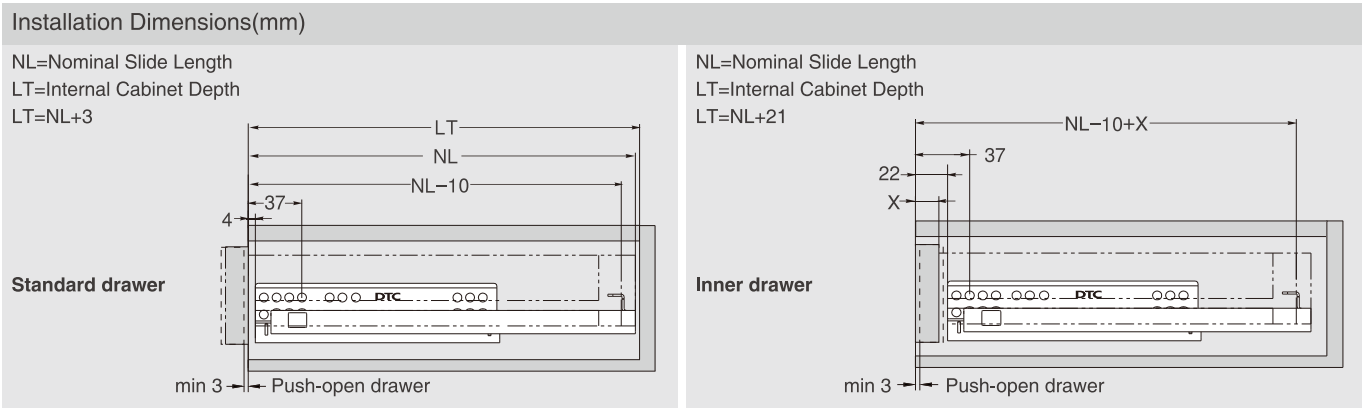







SOFT CLOSE DRAWER/PUSH-OPEN DRAWER

1	Slides (left/right)					
	Pre-zinc Steel (F02)					
	NL	Soft close Item No.	Set/ctn	Push-open Item No.	Set/ctn	
	250mm	TS80250H	10	TF80250H	6	
	270mm	TS80270H	10	TF80270H	6	
	300mm	TS80300H	10	TF80300H	6	
	350mm	TS80350H	10	TF80350H	6	
	400mm	TS80400H	10	TF80400H	6	
	450mm	TS80450H	10	TF80450H	6	
	500mm	TS80500H	10	TF80500H	6	
	550mm	TS80550H	10	TF80550H	6	
	600mm	TS80600H	10	TF80600H	6	

	2D Locking Device (Left/Right)	
	Dark Grey(H11)	
	Item No.	0TSD01-A

	3D Locking Device (Left/Right)	
	Dark Grey(H11)	
	Item No.	0TSD02-A

	Rod for Push-open Synchronization (For cutting to size,1100mm. Cutting:Internal cabinet width LW-180)	
	Item No.	HT0FH02

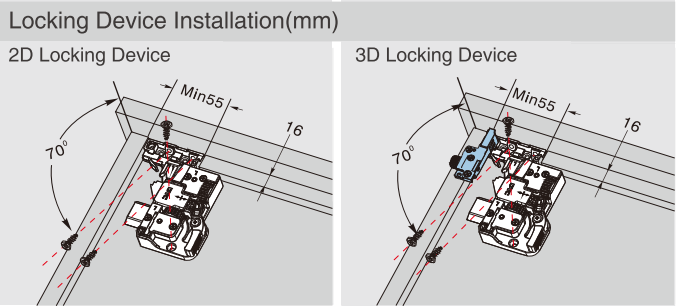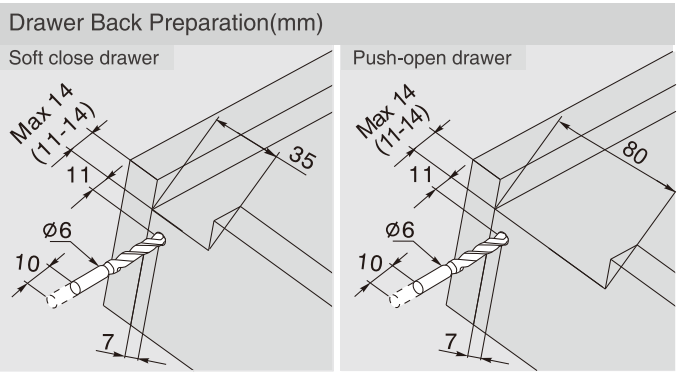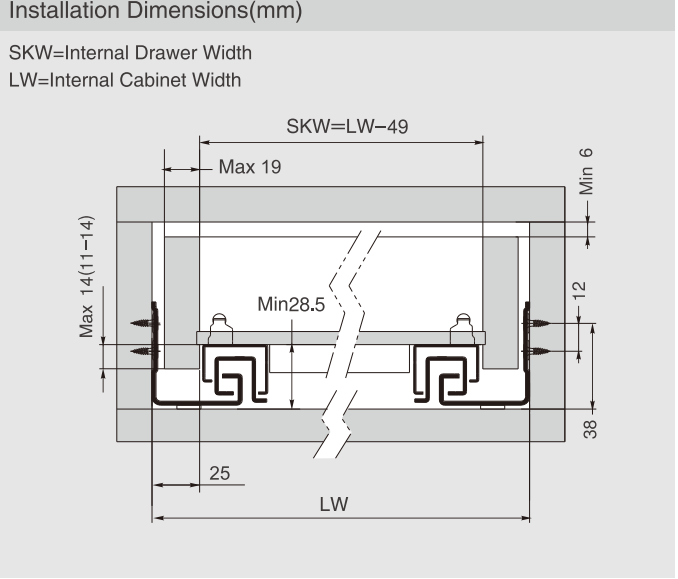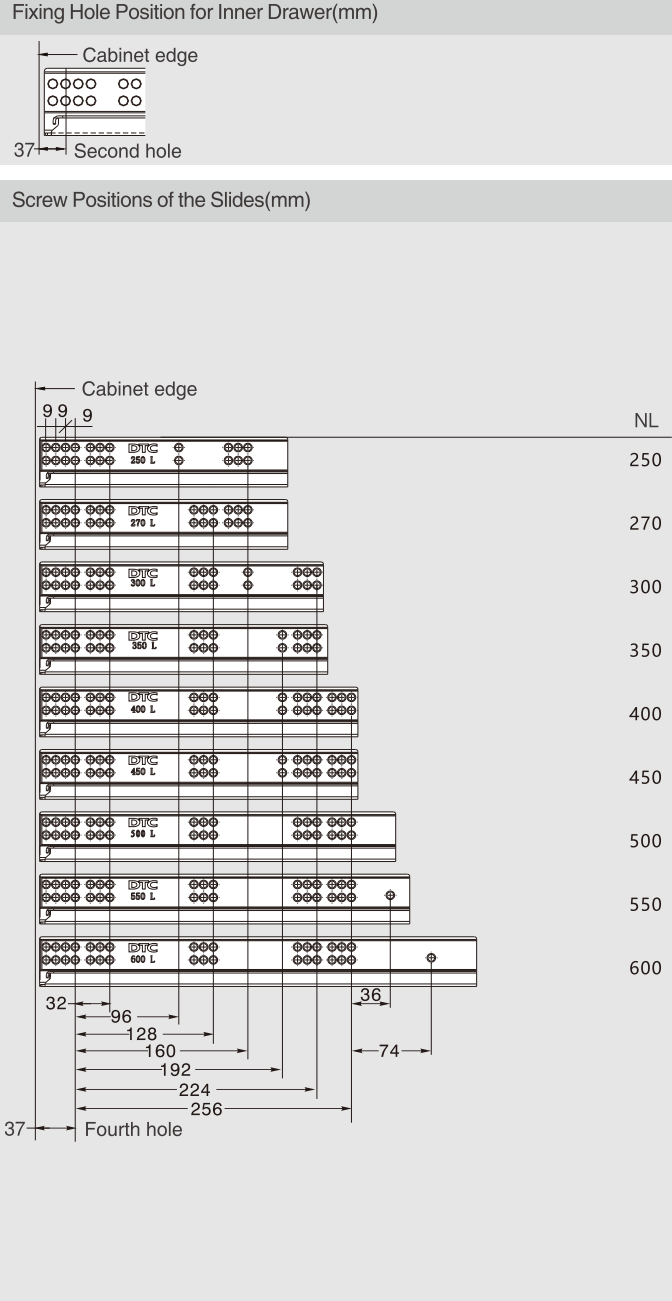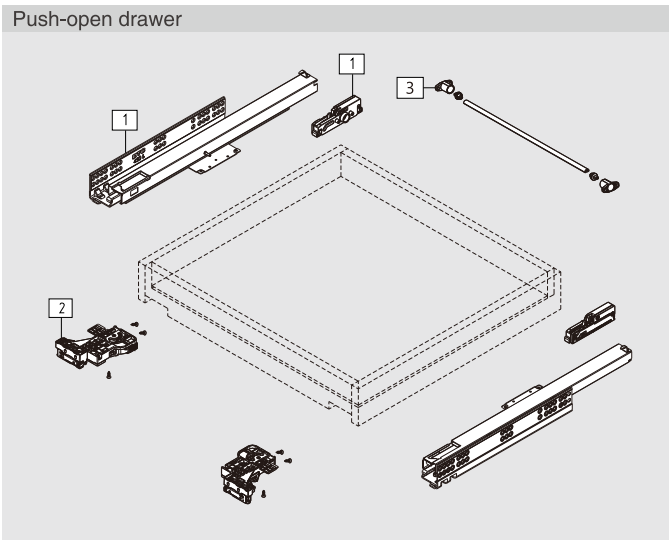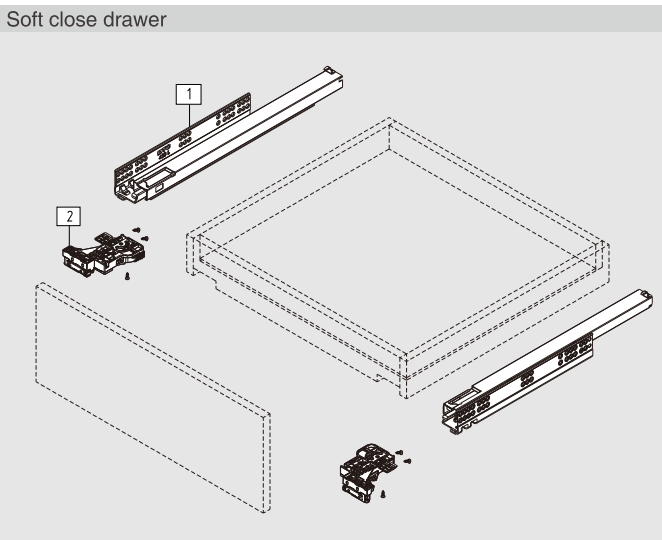

MAGIC-MOVE

TS11 Series Synchronized Full Extension Undermount Slides with Locking Device




PRODUCT




DESCRIPTION

- Load capacity: 60kg
- Finish: zinc plated
- Length: 450-750mm, full extension
- Silent system guarantees smooth run without noise
- 2D adjustment, up&down: 0-2.5mm, side:± 1.5mm
- 3D adjustment, up&down:0-2.5mm, side:± 1.5mm, depth: 0-3mm
- Maximum drawer side thickness:16mm

SPACE REQUIREMENT

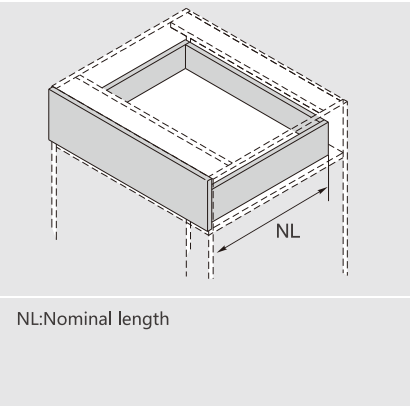







PLANNING

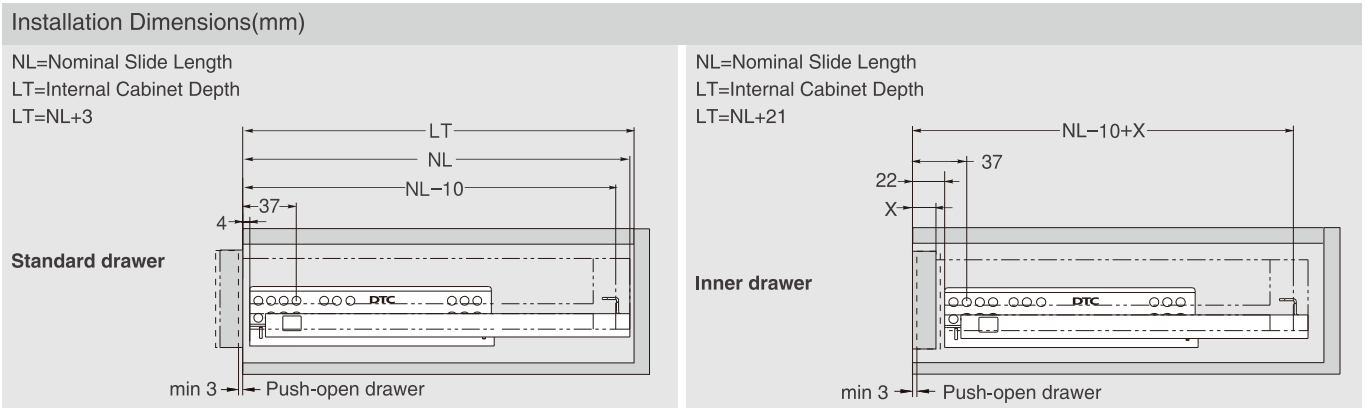

SOFT CLOSE DRAWER/PUSH-OPEN DRAWER/SOFT CLOSE&PUSH-OPEN DRAWER

1	Slides (left/right)					
	Pre-zinc Steel (F02)					
	NL	Soft close item No.	Set/ctn	Push-open item No.	Set/ctn	
	450mm	TS11450H	10	TF11450H	6	
	500mm	TS11500H	10	TF11500H	6	
	550mm	TS11550H	10	TF11550H	6	
	600mm	TS11600H	10	TF11600H	6	
	650mm	TS11650H	10	TF11650H	6	
	700mm	TS11700H	10	TF11700H	6	
	750mm	TS11750H	10	TF11750H	6	

2	2D Locking Device (Left/Right)	
	Dark Grey(H11)	Item No. 0TSD01-A
2	3D Locking Device (Left/Right)	
	Dark Grey(H11)	Item No. 0TSD02-A
3	Rod for Push-open Synchronization (For cutting to size,1100mm. Cutting:Internal cabinet width LW-172)	
	Item No. HT0FH02	

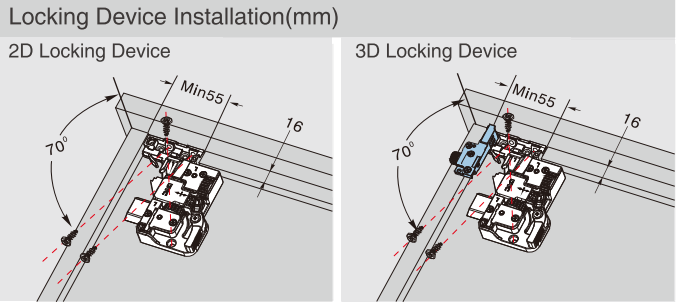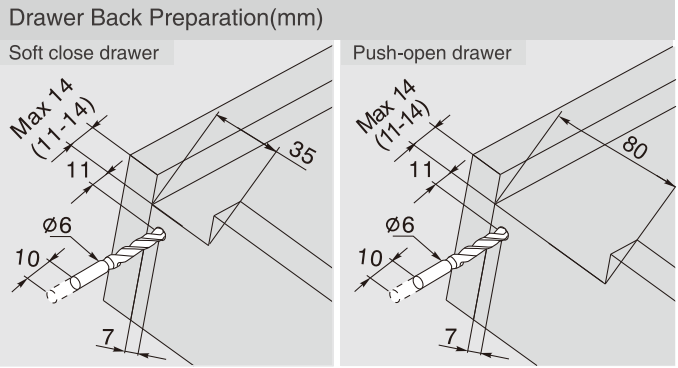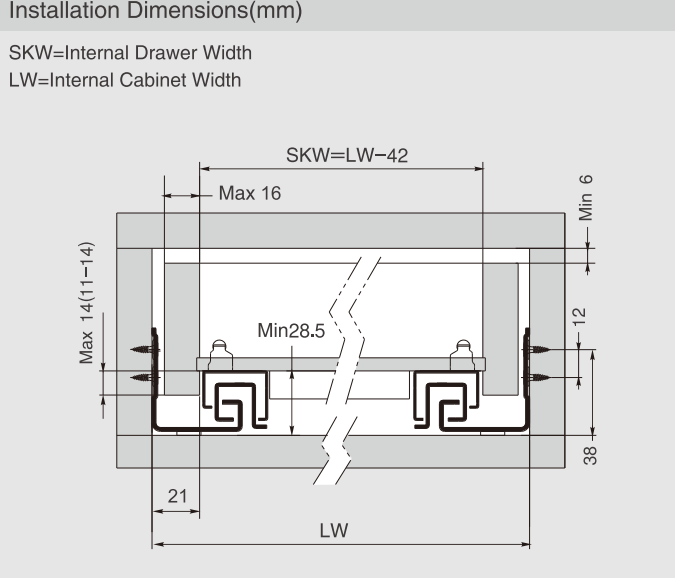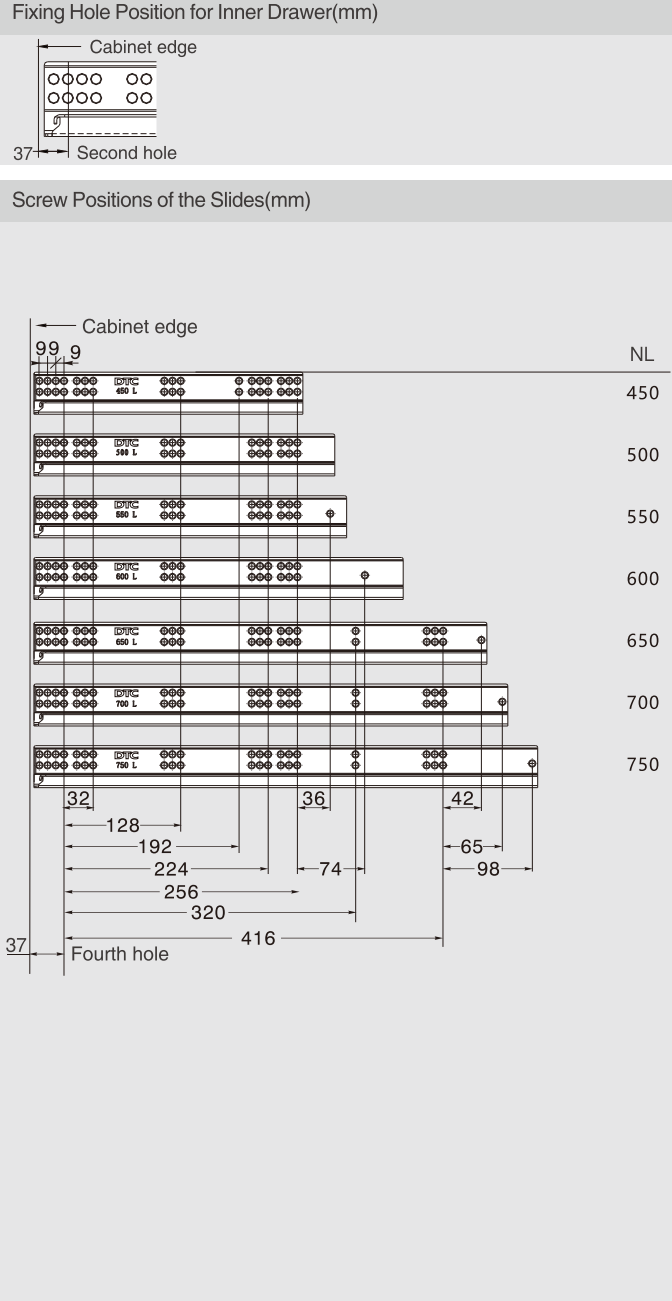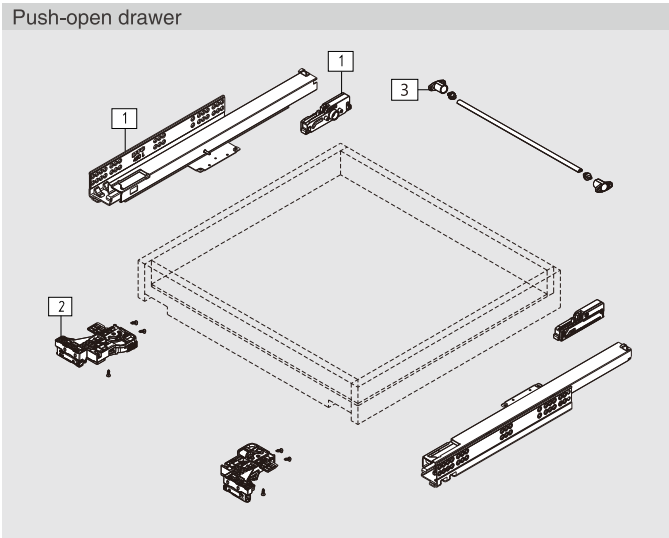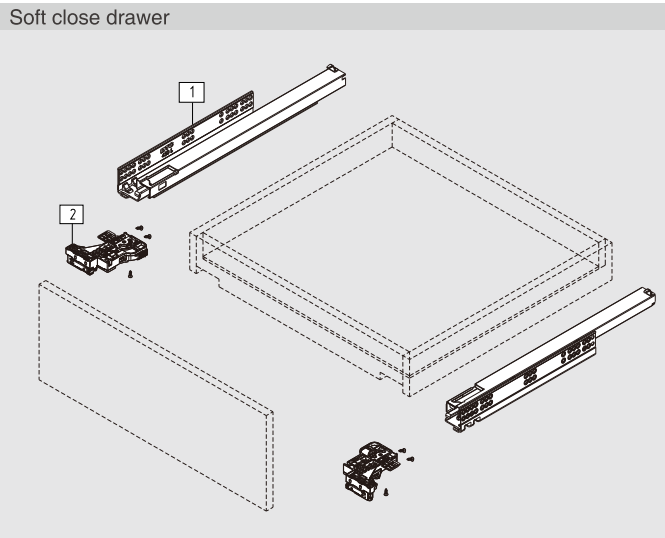

MAGIC-MOVE

TS81 Series Synchronized Full Extension Undermount Slides with Locking Device




PRODUCT




DESCRIPTION

- Load capacity: 60kg
- Finish: zinc plated
- Length: 450-750mm, full extension
- Silent system guarantees smooth run without noise
- 2D adjustment, up&down:0-2.5mm, side:± 1.5mm
- 3D adjustment, up&down:0-2.5mm, side:± 1.5mm, depth: 0-3mm
- Maximum drawer side thickness:19mm

SPACE REQUIREMENT

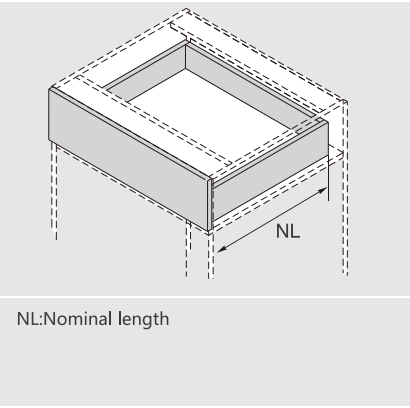





PLANNING

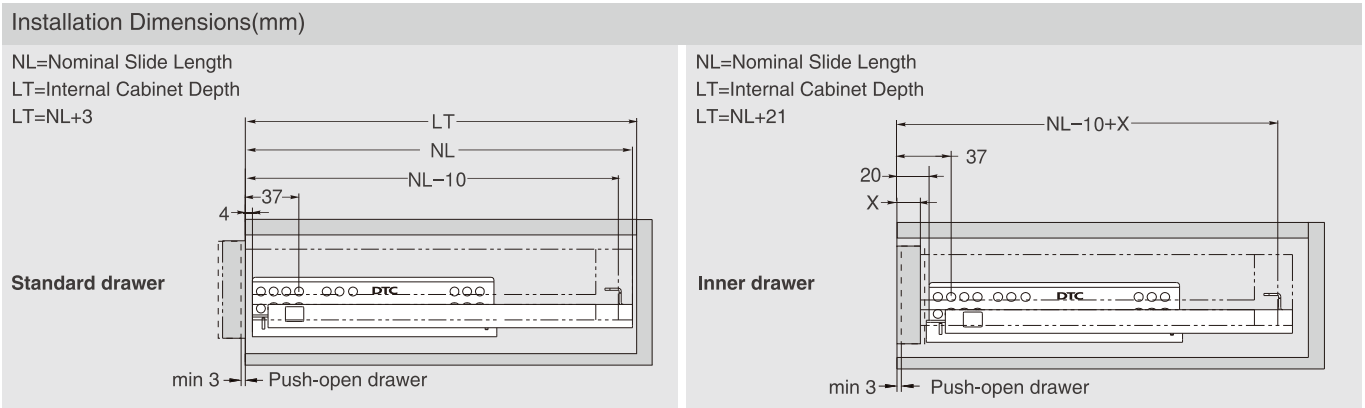

SOFT CLOSE DRAWER/PUSH-OPEN DRAWER

1	Slides (left/right)					
	Pre-zinc Steel (F02)					
	NL	Soft close Item No.	Set/ctn	Push-open Item No.	Set/ctn	
	450mm	TS81450H	10	TF81450H	6	
	500mm	TS81500H	10	TF81500H	6	
	550mm	TS81550H	10	TF81550H	6	
	600mm	TS81600H	10	TF81600H	6	
	650mm	TS81650H	10	TF81650H	6	
	700mm	TS81700H	10	TF81700H	6	
	750mm	TS81750H	10	TF81750H	6	

2	2D Locking Device (Left/Right)	
	Dark Grey(H11)	Item No. 0TSD01-A
2	3D Locking Device (Left/Right)	
	Dark Grey(H11)	Item No. 0TSD02-A
3	Rod for Push-open Synchronization (For cutting to size,1100mm. Cutting:Internal cabinet width LW-180)	
		Item No. HT0FH02

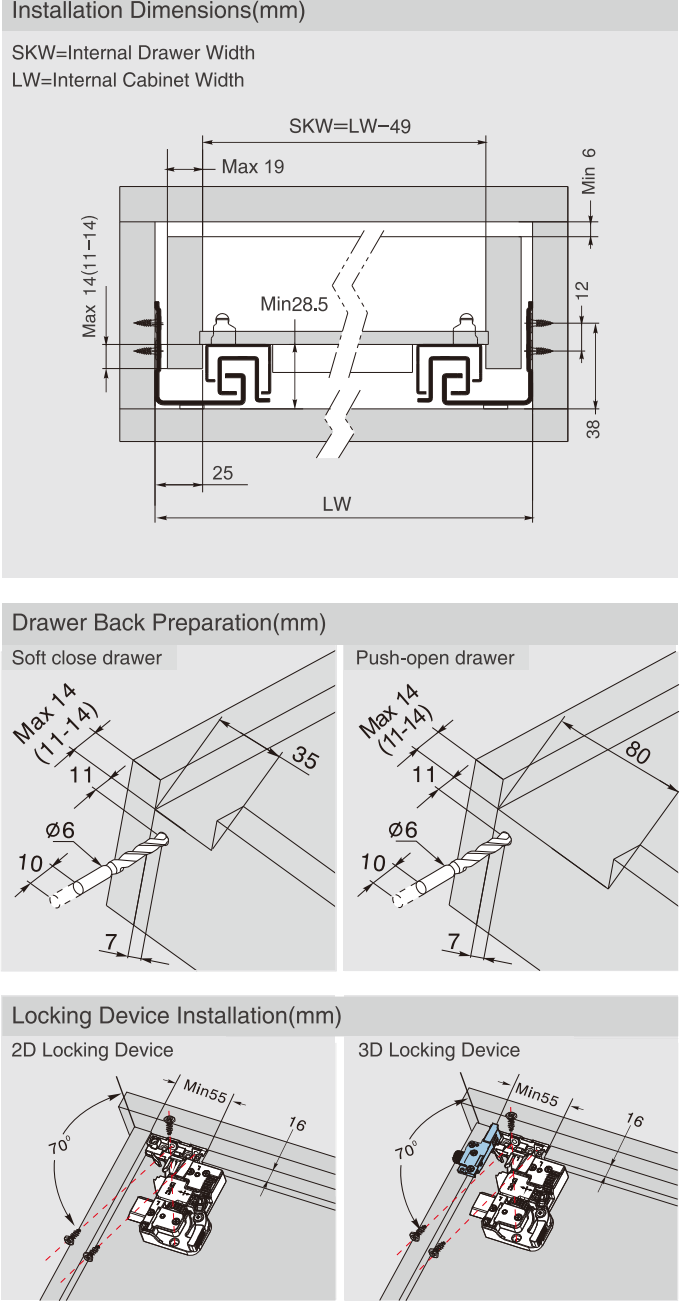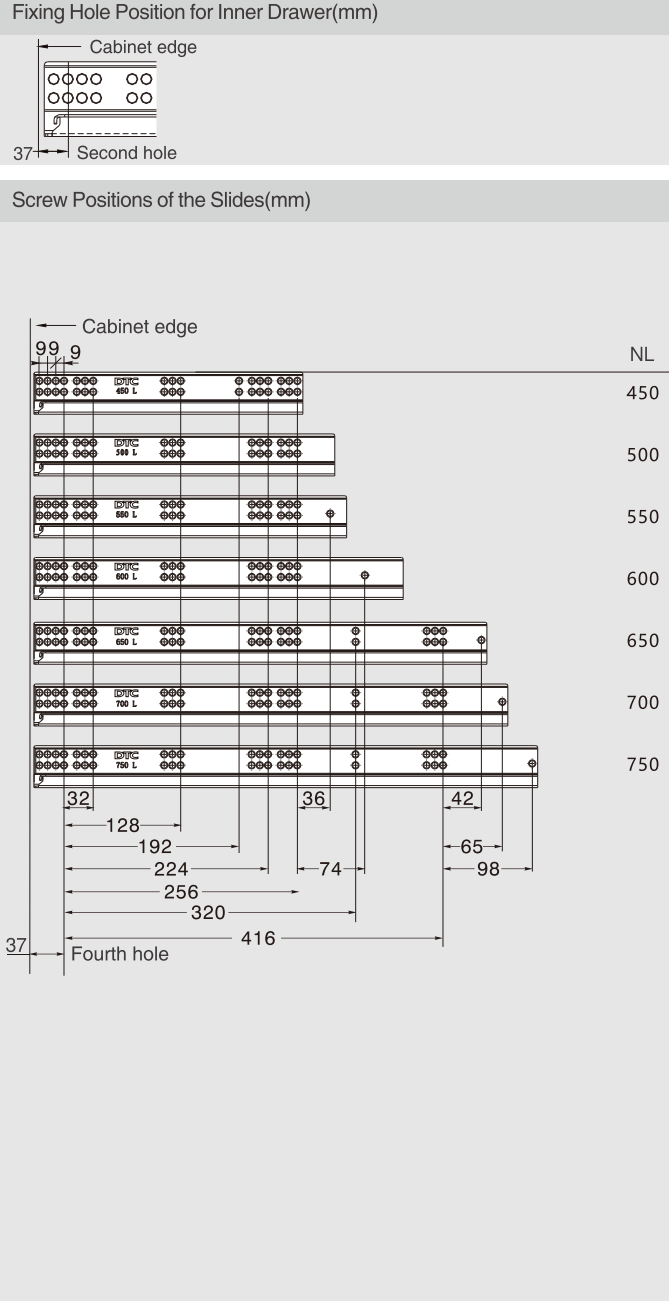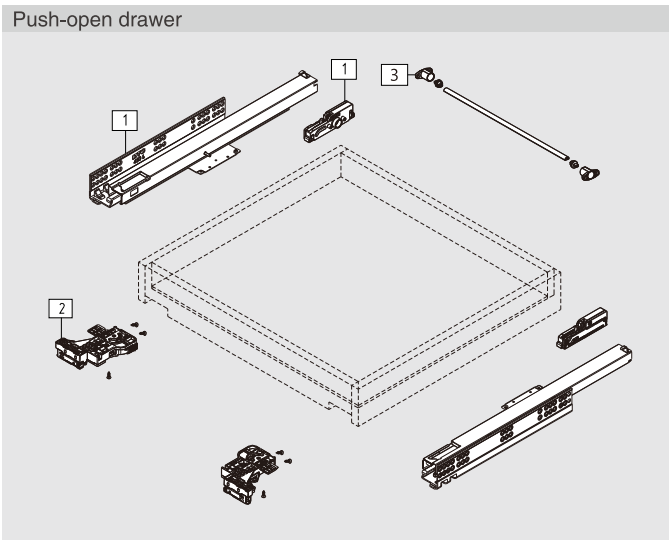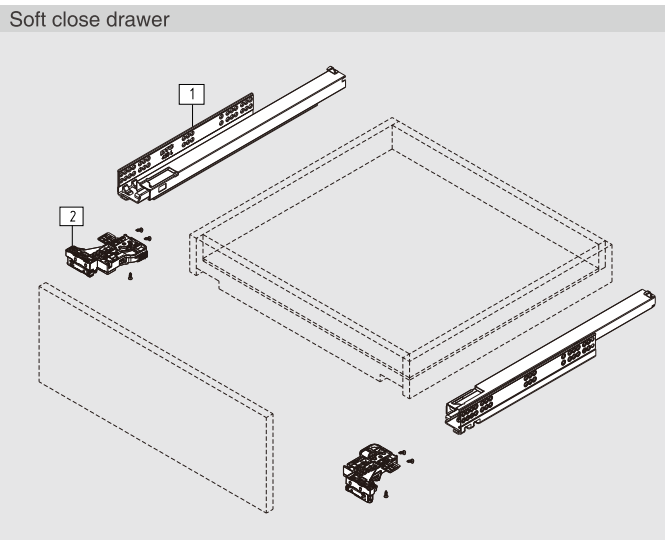

ASSEMBLY AND ADJUSTMENT

Assembly and Adjustment(for MAGIC-MOVE)



Drawer Assembly with 3D Adjustment Locking Device

Fix the slide onto the cabinet.

Move out the adjusting part and fix the locking device onto the drawer bottom.
Put the adjusting part back and tighten the screws.

Drawer Assembly with 3D Adjustment Locking Device

Lay the drawer bottom onto the slide then push the drawer into the cabinet.

Adjustment

Up&down adjustment

Side adjustment

Depth adjustment

Removal

Hold the handle
Pull-out

For removal, hold the handle and pull out the drawer.

Drawer Assembly with 2D Adjustment Locking Device

Fix the slide onto the cabinet.

Fix the locking device onto the drawer bottom.

Drawer Assembly with 2D Adjustment Locking Device

Lay the drawer bottom onto the slide then push the drawer into the cabinet.

Adjustment

Up&down adjustment

Side adjustment

Removal

Hold the handle
Pull-out

For removal, hold the handle and pull out the drawer.

UNDERMOUNT
SLIDE SERIES

D-MOTION

D-MOTION

Soft-close and silent system

A Smooth Drawer



- DTC D-motion undermount slide, silent and soft-close
- A complete program fitting a variety of applications with soft-close, push-open, locking device and pin mount options.
- Highly stable construction, verified durability



Quietness



Intelligence



Durability



Eco-Friendliness

D-MOTION is a strong foundation for wood drawers with a smooth running action and a stable, comfortable feel.

DTC
Global Quality Benchmark

UNDERMOUNT SLIDE SERIES D-MOTION



Whatever the drawer size,
D-MOTION produces a smooth
running action.





Options are abundant: Locking devices or pin mount, 16-19mm drawer sides, soft-close or push-open and slide lengths for common applications. Virtually any cabinet or furniture situation can be accommodated.



UNDERMOUNT SLIDE SERIES D-MOTION



The long stroke of the soft-close dampers ensures the closing action is smooth and silent.

D-MOTION

DS10 Series Full Extension Undermount Slides with Locking Device




PRODUCT




DESCRIPTION

- Load capacity: 35kg
- Finish: zinc plated
- Length: 250-600mm, full extension
- Silent system guarantees smooth run without noise
- 2D adjustment, up&down: 0-3mm, side: ± 1.5mm
- 3D adjustment, up&down: 0-3mm, side: ± 1.5mm, depth: 0-3mm
- Maximum drawer side thickness: 16mm

SPACE REQUIREMENT

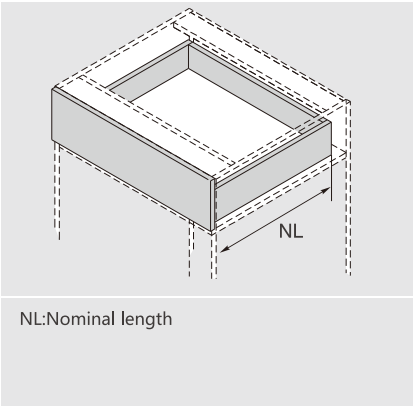









PLANNING

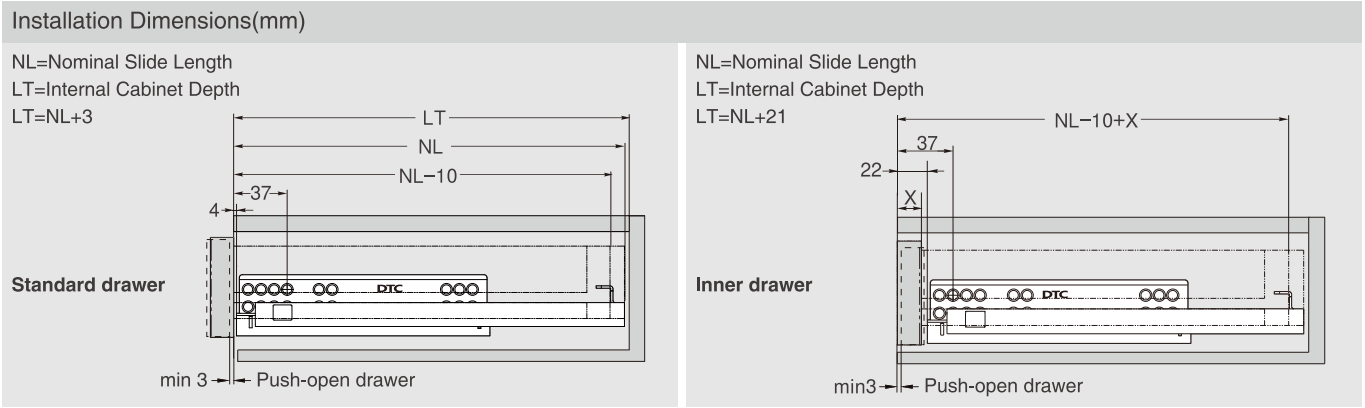

SOFT CLOSE DRAWER/PUSH-OPEN DRAWER/SOFT CLOSE&PUSH-OPEN DRAWER

1 Slides (left/right)						
Pre-zinc Steel (F02)						
NL	Soft close Item No.	Set/ctn	Push-open Item No.	Set/ctn	Soft Close+ Push-open Item No.	Set/ctn
250mm	DS10250H	10	DF10250H	6		
270mm	DS10270H	10	DF10270H	6		
300mm	DS10300H	10	DF10300H	6		
350mm	DS10350H	10	DF10350H	6	FDS10350H	6
400mm	DS10400H	10	DF10400H	6	FDS10400H	6
450mm	DS10450H	10	DF10450H	6	FDS10450H	6
500mm	DS10500H	10	DF10500H	6	FDS10500H	6
550mm	DS10550H	10	DF10550H	6	FDS10550H	6
600mm	DS10600H	10	DF10600H	6	FDS10600H	6

2D Locking Device (Left/Right)	
Dark Grey(H11)	
Item No.	0DSD03-A
2 3D Locking Device (Left/Right)	
Dark Grey(H11)	
Item No.	0DSD04-A
3 Rod for Push-open Synchronization (For cutting to size, 1100mm. Cutting: Internal cabinet width LW-172)	
Item No.	
HT0FH02	

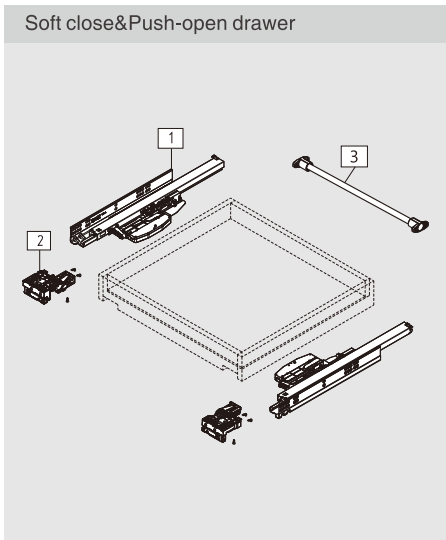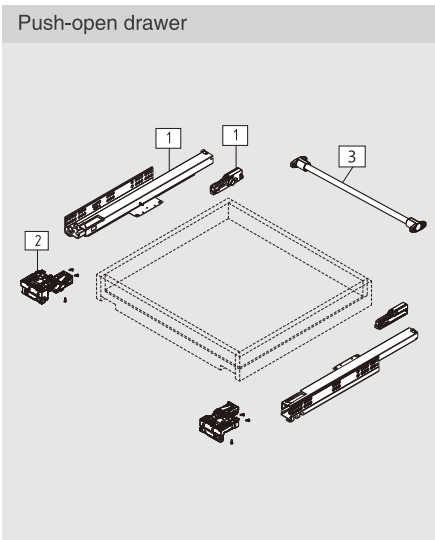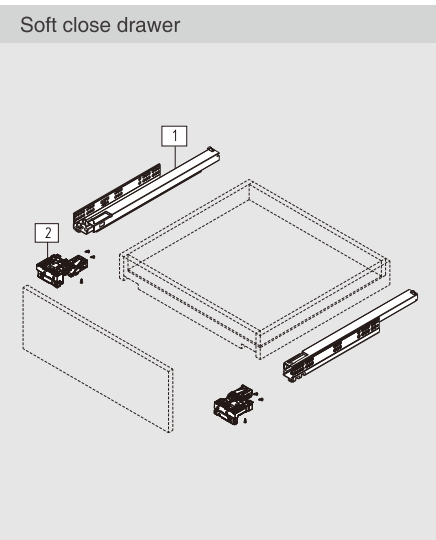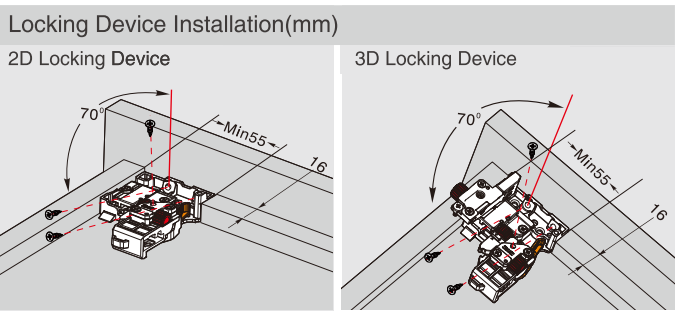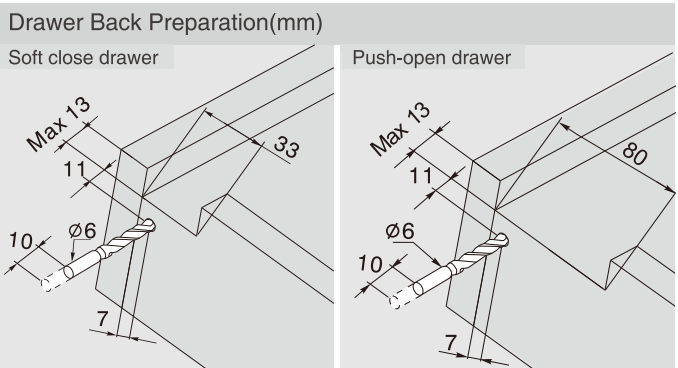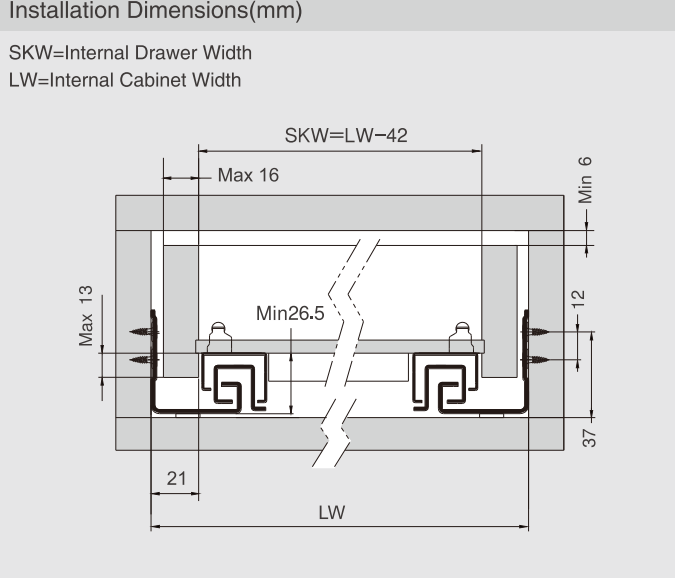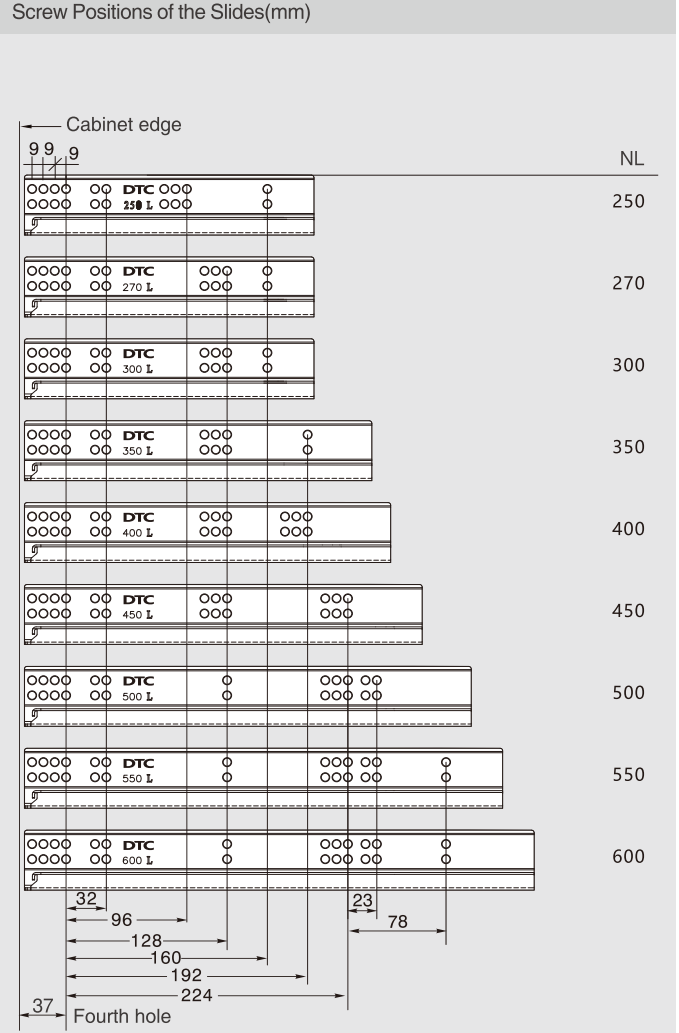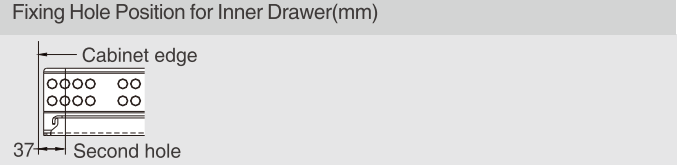

D-MOTION

DS80 Series Full Extension Undermount Slides with Locking Device




PRODUCT




DESCRIPTION

- Load capacity: 35kg
- Finish: zinc plated
- Length: 250-600mm, full extension
- Silent system guarantees smooth run without noise
- 2D adjustment, up&down: 0-3mm, side: ± 1.5mm
- 3D adjustment, up&down: 0-3mm, side: ± 1.5mm, depth: 0-3mm
- Maximum drawer side thickness: 19mm

SPACE REQUIREMENT

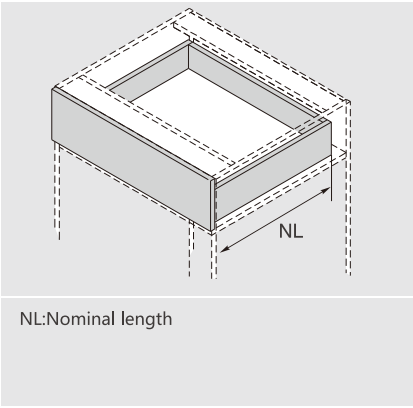




PLANNING

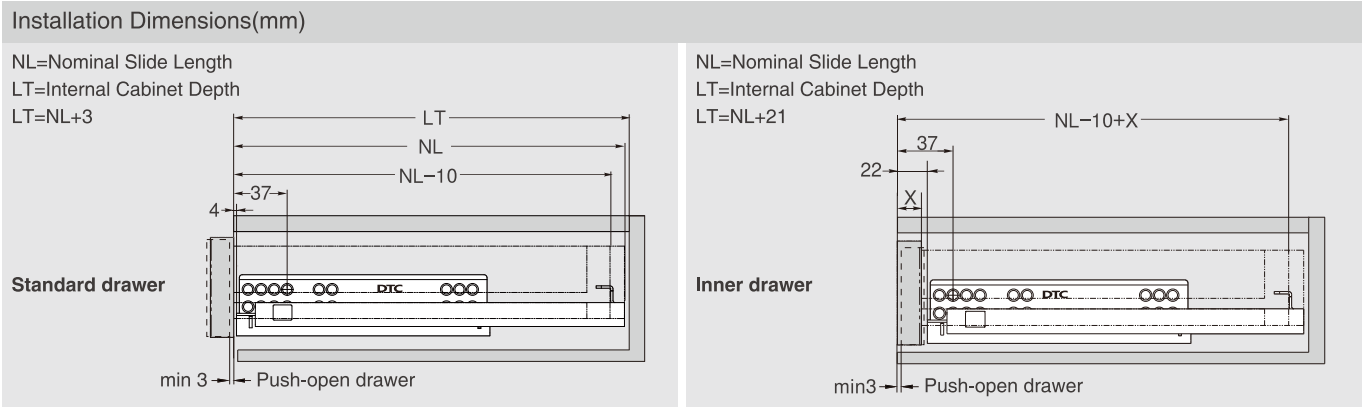




SOFT CLOSE DRAWER/PUSH-OPEN DRAWER

1	Slides (left/right)					
	Pre-zinc Steel (F02)					
NL	Soft close item No.	Set/ctn	Push-open item No.	Set/ctn		
250mm	DS80250H	DF80250H	10			
270mm	DS80270H	DF80270H	10			
300mm	DS80300H	DF80300H	10			
350mm	DS80350H	DF80350H	10			
400mm	DS80400H	DF80400H	10			
450mm	DS80450H	DF80450H	10			
500mm	DS80500H	DF80500H	10			
550mm	DS80550H	DF80550H	10			
600mm	DS80600H	DF80600H	10			

2	2D Locking Device (Left/Right)	
	Dark Grey(H11)	Item No. 0DSD03-A
2	3D Locking Device (Left/Right)	
	Dark Grey(H11)	Item No. 0DSD04-A
3	Rod for Push-open Synchronization (For cutting to size, 1100mm. Cutting: Internal cabinet width LW-180)	
		Item No. HT0FH02

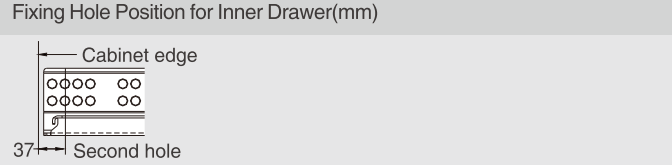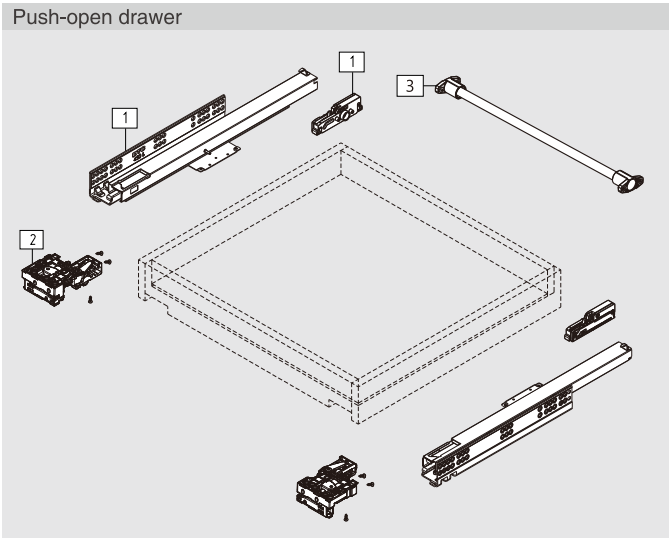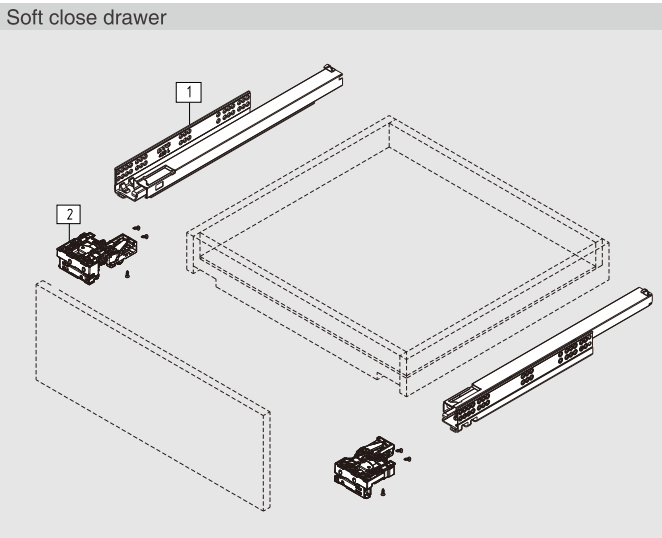


Screw Positions of the Slides(mm)	
Cabinet edge	NL
9 9 9	250
9 9 9	270
9 9 9	300
9 9 9	350
9 9 9	400
9 9 9	450
9 9 9	500
9 9 9	550
9 9 9	600
32 96 128 160 192 224	78
37	Fourth hole

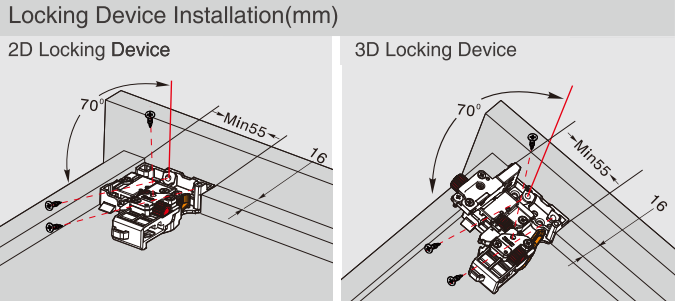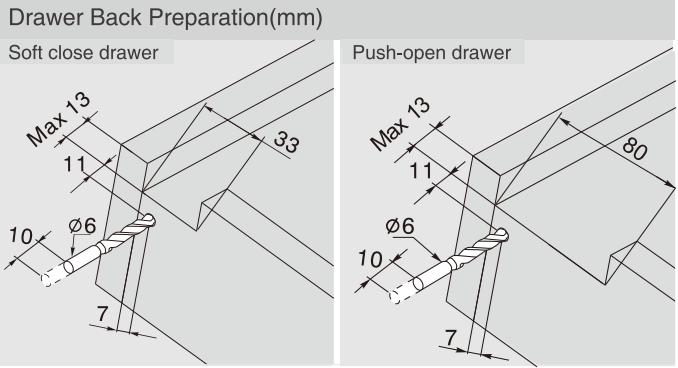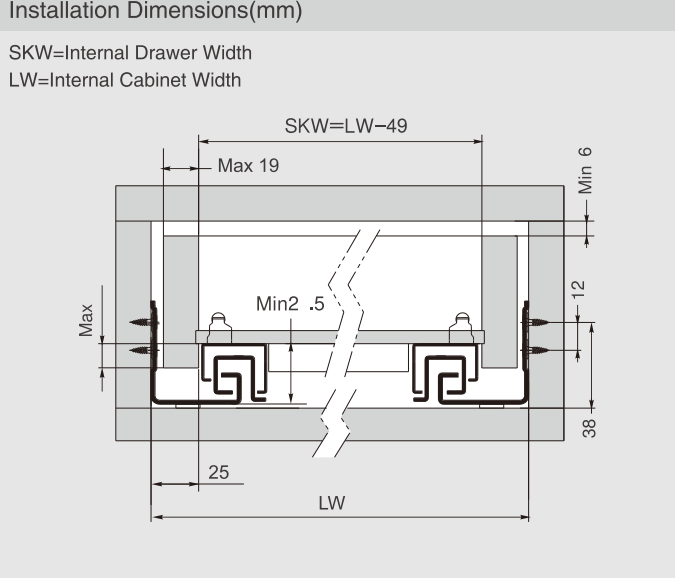


ASSEMBLY AND ADJUSTMENT


Assembly and Adjustment (for DS series)

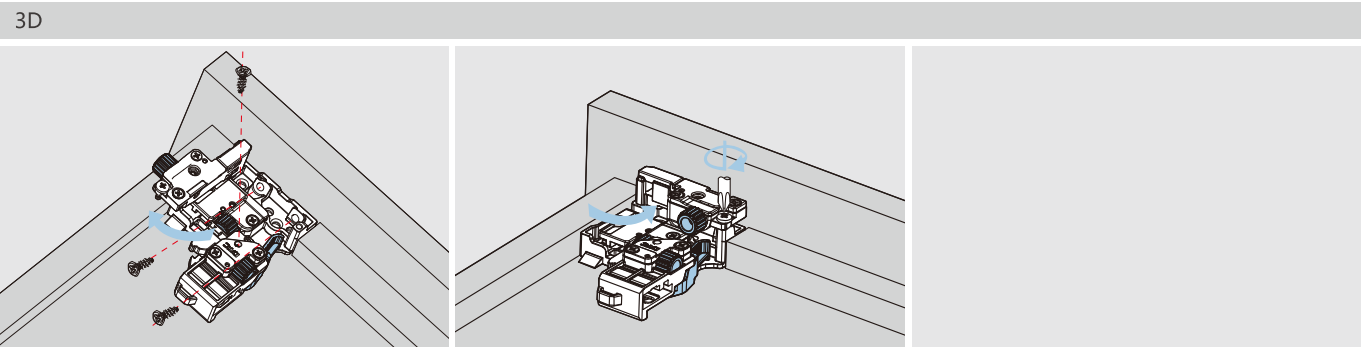


Move out the adjusting part and fix the locking device onto the drawer bottom.
Put the adjusting part back and tighten the screws.

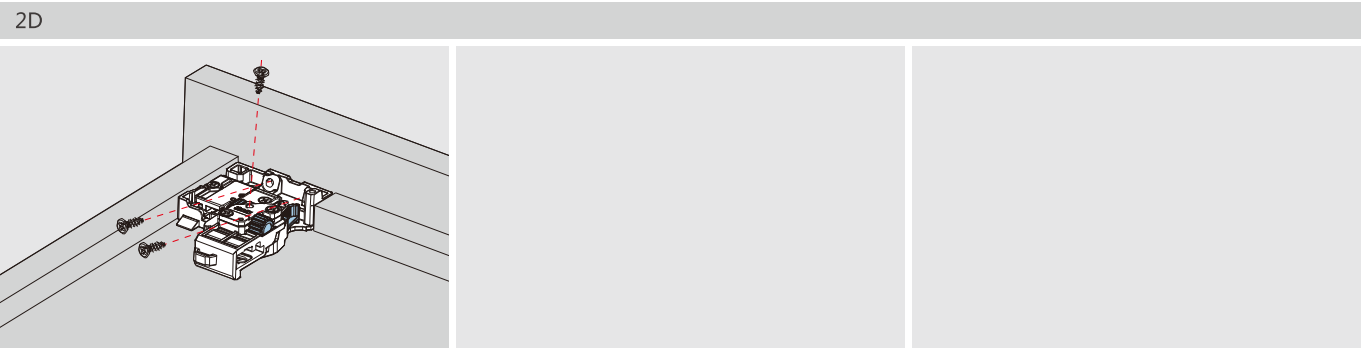


Fix the locking device onto the drawer bottom.

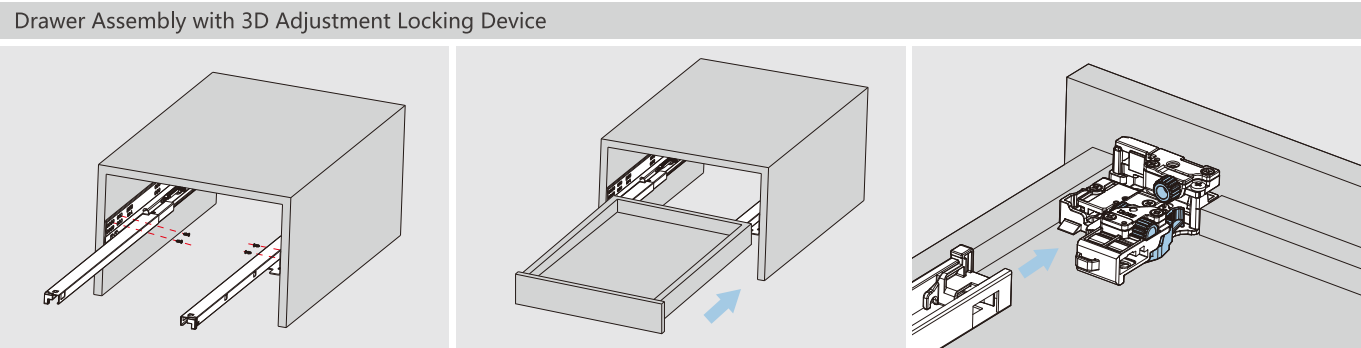


Fix the slide onto the cabinet.
Lay the drawer bottom onto the slide then push the drawer into the cabinet.

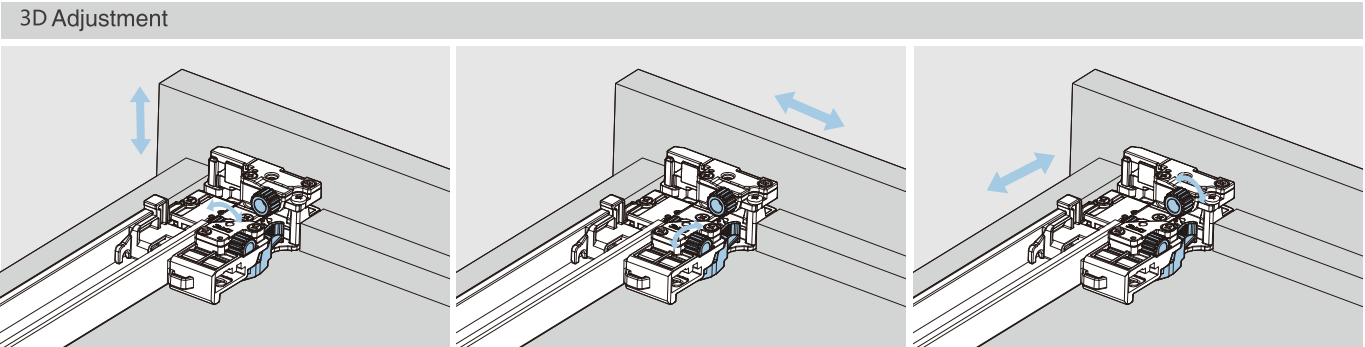

Up&down adjustment Side adjustment Depth adjustment

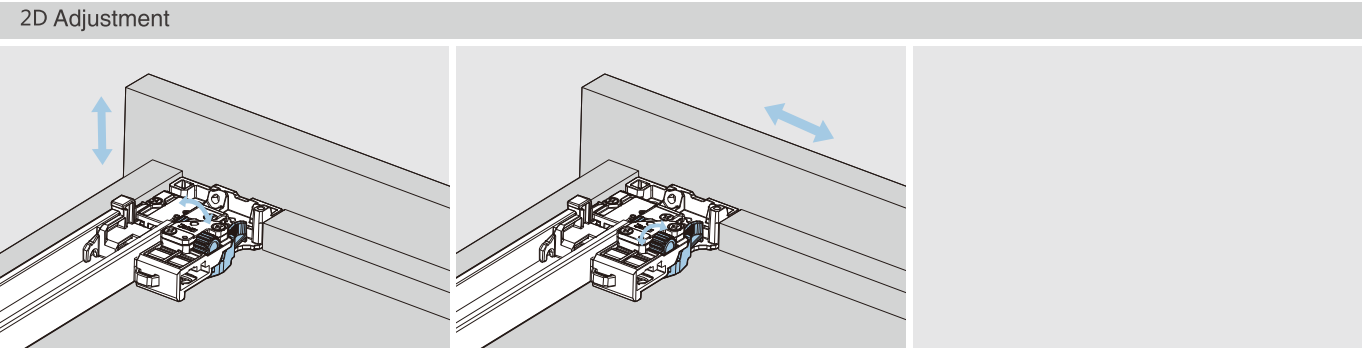

Up&down adjustment Side adjustment

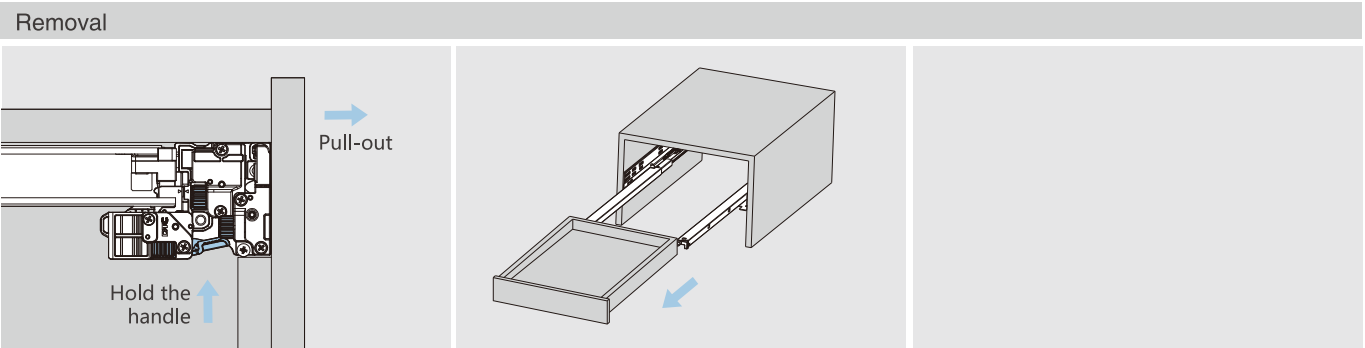

For removal, hold the handle and pull out the drawer.




PRODUCT




DESCRIPTION

- Load capacity: 35kg
- Finish: zinc plated
- Length: 250-600mm
- Full extension
- Tool free assembly and removal of drawer
- Silent system guarantees smooth run without noise
- Drawer up&down adjustment: 0~+3mm
- Maximum drawer side thickness:16mm

SPACE REQUIREMENT

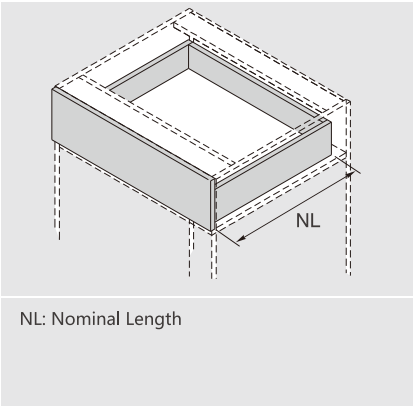

PLANNING

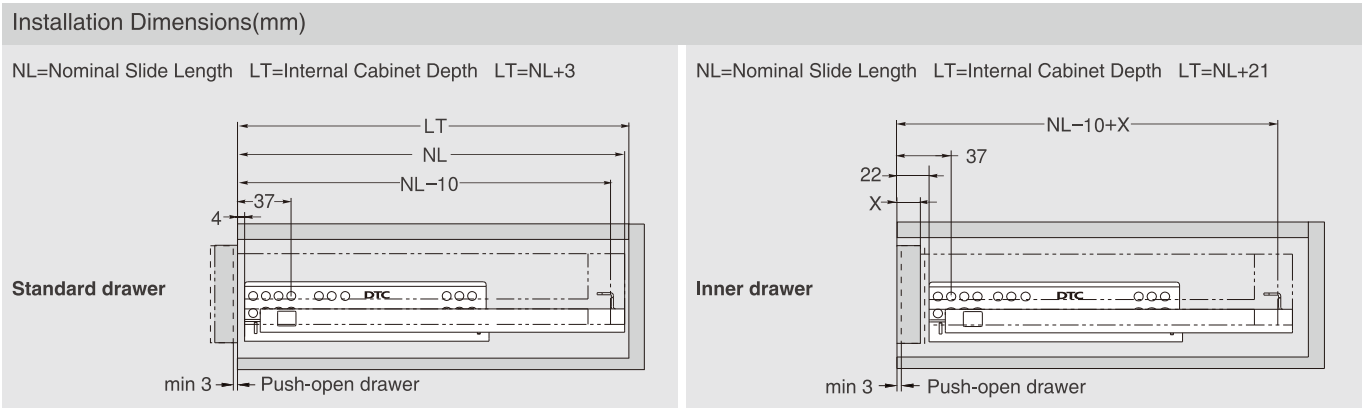

SOFT CLOSE DRAWER / PUSH-OPEN DRAWER

1










Slides (left/right)

Pre-zinc Steel (F02)

NL	 Soft Close item No.	Set/ctn	 Push-open item No.	Set/ctn
250mm	SS10250H	10	FF10250HX	6
270mm	SS10270H	10	FF10270HX	6
300mm	SS10300H	10	FF10300HX	6
350mm	SS10350H1	10	FF10350HX	6
400mm	SS10400H1	10	FF10400HX	6
450mm	SS10450H1	10	FF10450HX	6
500mm	SS10500H1	10	FF10500HX	6
550mm	SS10550H1	10	FF10550HX	6
600mm	SS10600H1	10	FF10600HX	6

2	Locking Device (left/right)
Dark Grey(H11)	
Item No.	0SSLD01-A
3	Rod for Push-open Synchronization /For cutting to size,1100mm,Cutting:Internal cabinet width LW-172
Item No.	HT0FH02

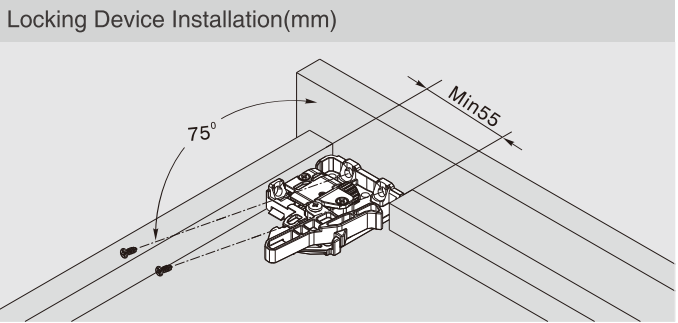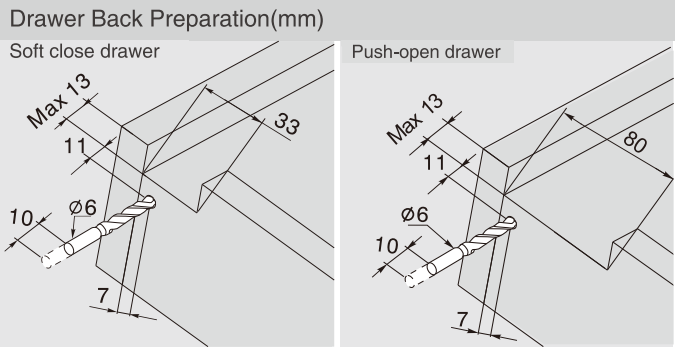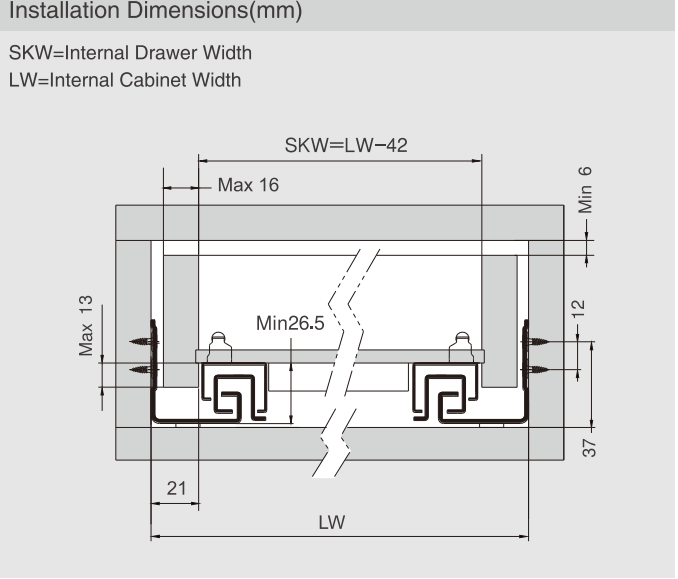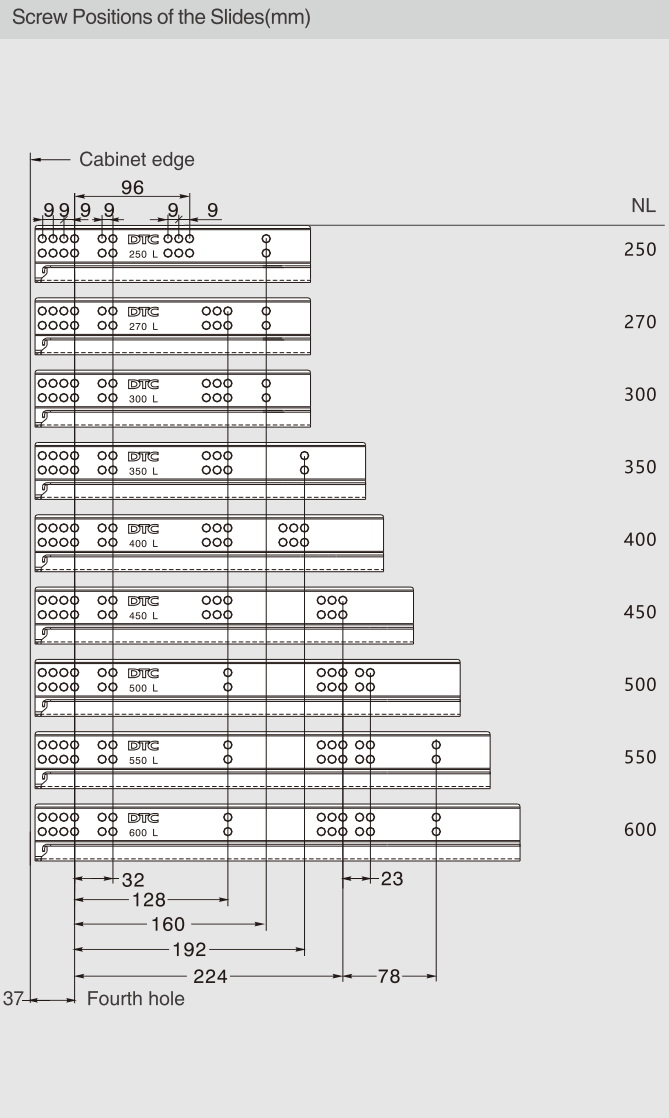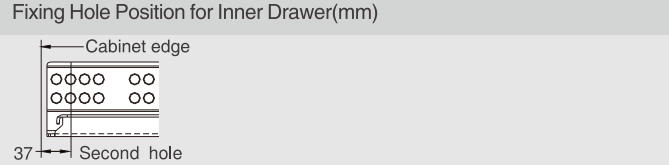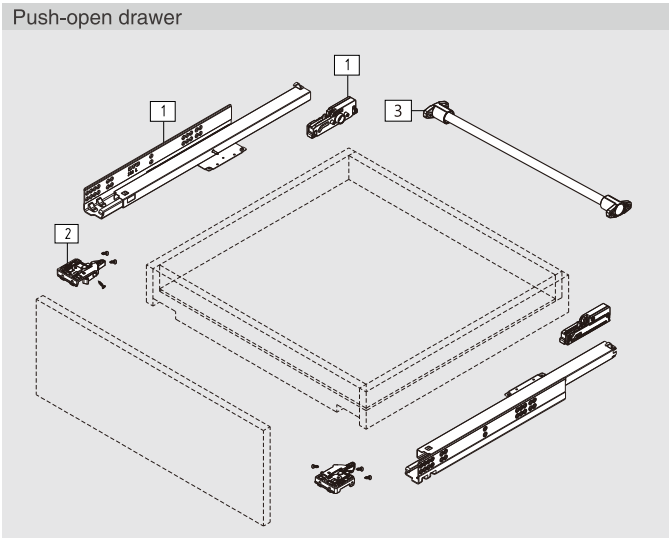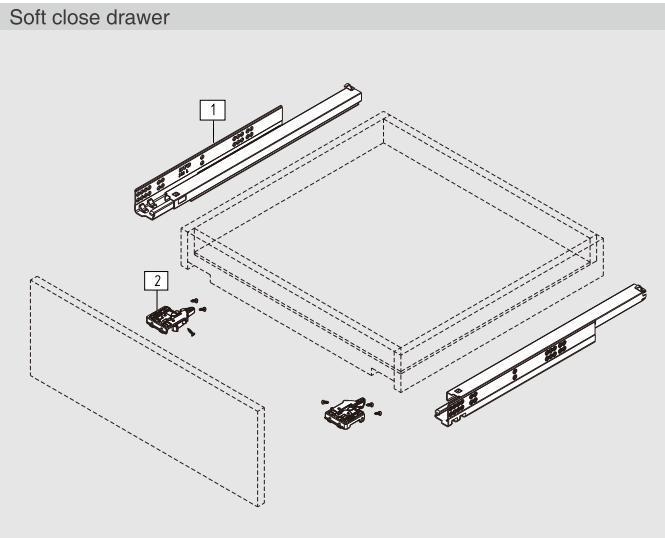




PRODUCT




DESCRIPTION

- Load capacity: 35kg
- Finish: zinc plated
- Length: 250-600mm
- Full extension
- Tool free assembly and removal of drawer
- Silent system guarantees smooth run without noise
- Drawer up&down adjustment: 0~+3mm
- Maximum drawer side thickness:19mm

SPACE REQUIREMENT

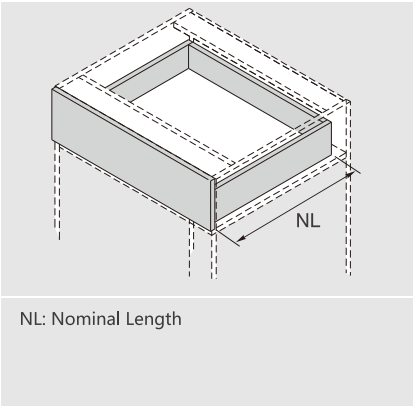

PLANNING

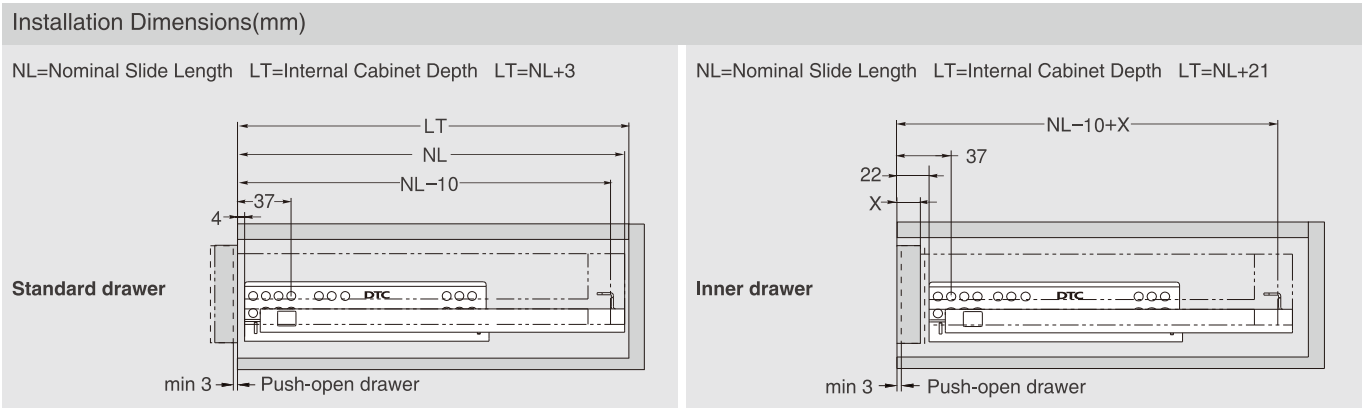

SOFT CLOSE DRAWER / PUSH-OPEN DRAWER

1










Slides (left/right)

Pre-zinc Steel (F02)

NL	 Soft Close item No.	Set/ctn	 Push-open item No.	Set/ctn
250mm	SS80250H	10	FF80250HX	6
270mm	SS80270H	10	FF80270HX	6
300mm	SS80300H	10	FF80300HX	6
350mm	SS80350H1	10	FF80350HX	6
400mm	SS80400H1	10	FF80400HX	6
450mm	SS80450H1	10	FF80450HX	6
500mm	SS80500H1	10	FF80500HX	6
550mm	SS80550H1	10	FF80550HX	6
600mm	SS80600H1	10	FF80600HX	6

2	Locking Device (left/right)
Dark Grey(H11)	
Item No.	0SSLD01-A
3	Rod for Push-open Synchronization /For cutting to size,1100mm,Cutting:Internal cabinet width LW-180
Item No.	HT0FH02

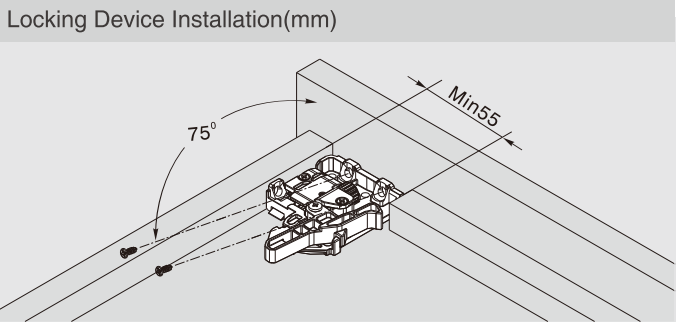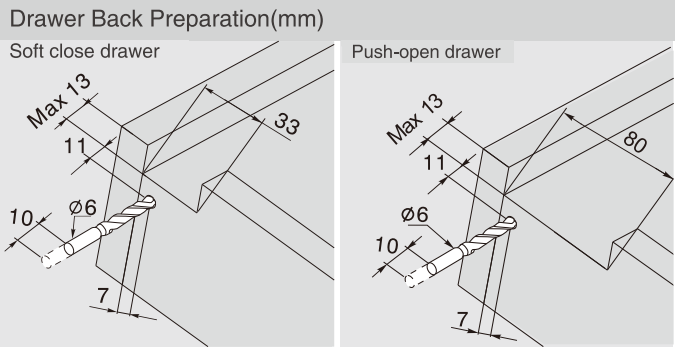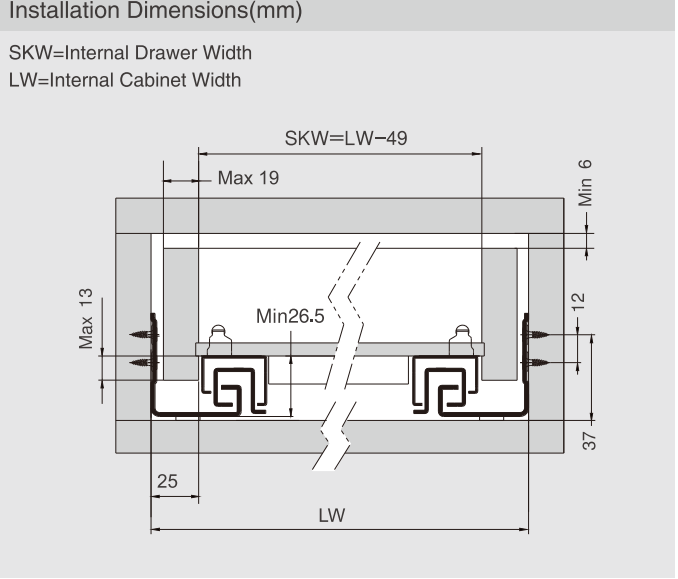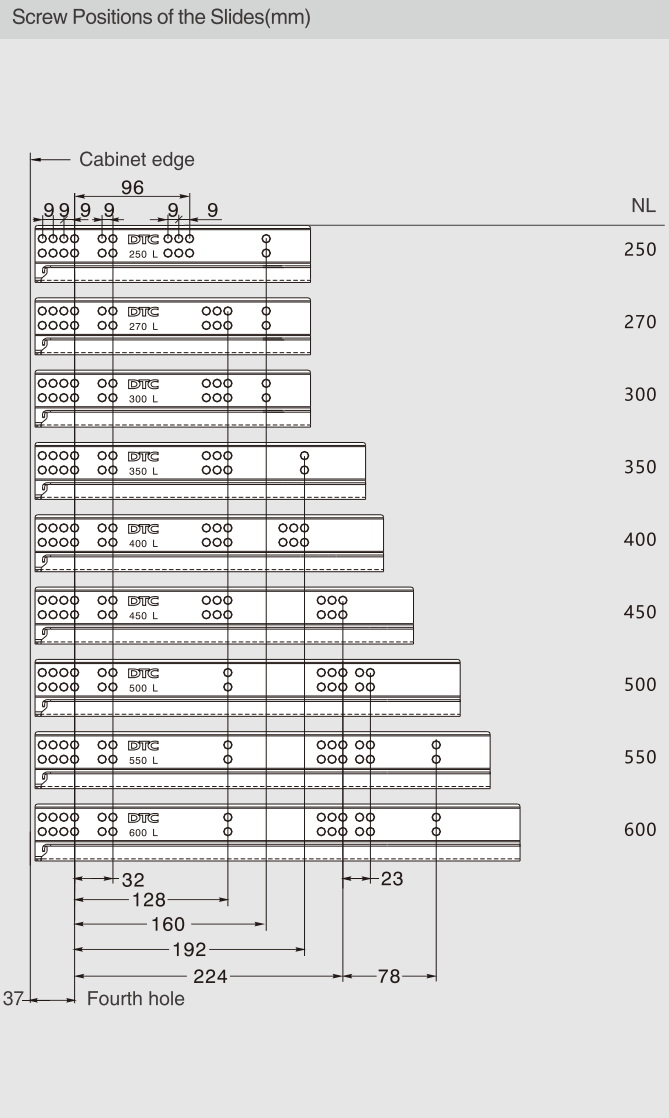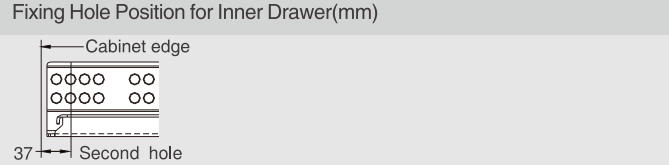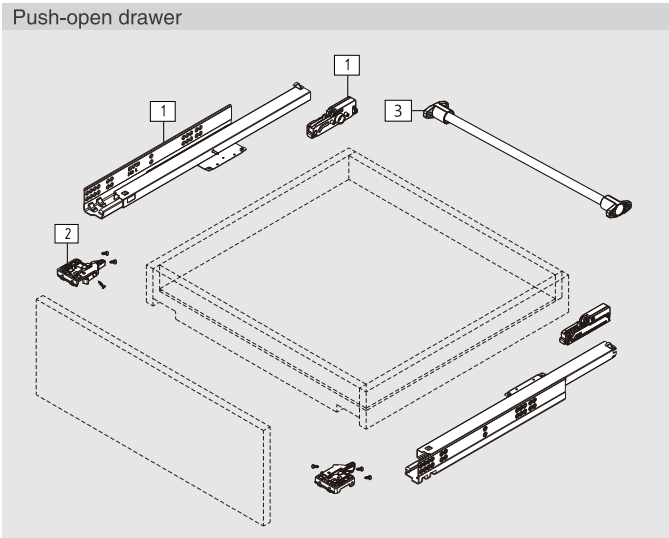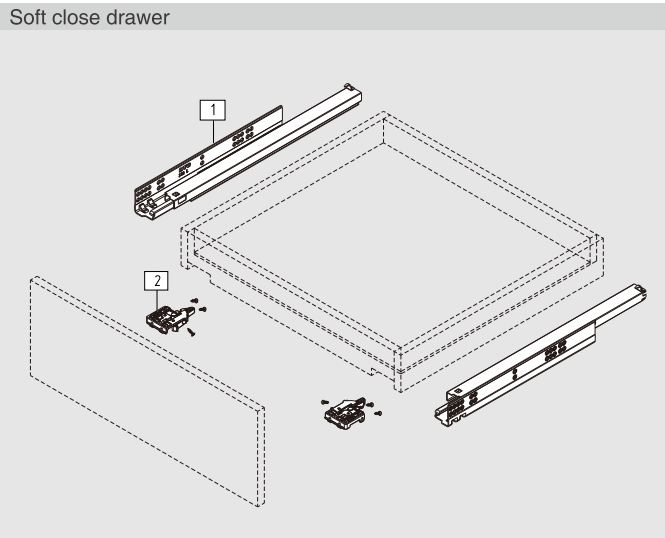

D-MOTION

SS10C Series Full Extension Undermount Slides with Peg




PRODUCT




DESCRIPTION

- Load capacity: 35kg
- Finish: zinc plated
- Length: 250-600mm
- Full extension
- Tool free assembly and removal of drawer
- Silent system guarantees smooth run without noise
- Drawer up&down adjustment: 0~+4mm
- Maximum drawer side thickness:16mm

SPACE REQUIREMENT

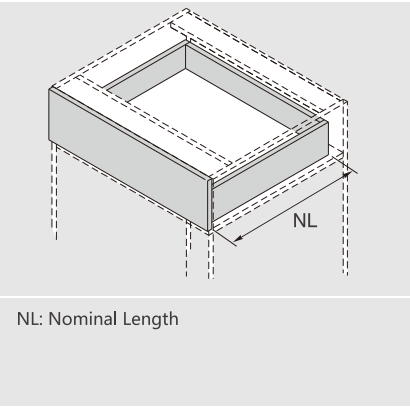

PLANNING

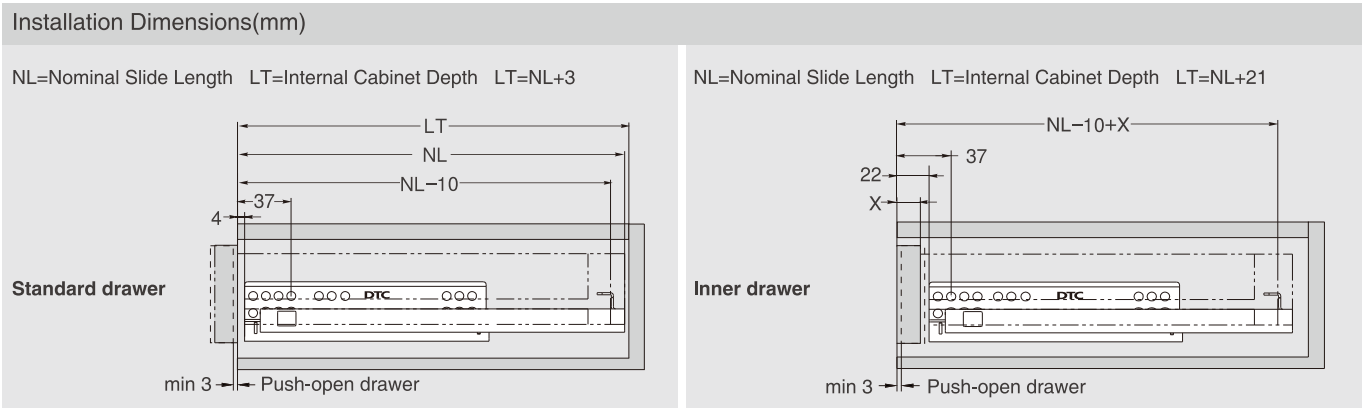

SOFT CLOSE DRAWER / PUSH-OPEN DRAWER

1










Slides (left/right)

Pre-zinc Steel (F02)

NL	 Soft Close item No.	Set/ctn	 Push-open item No.	Set/ctn
250mm	SS10C250H	10	FF10C250HX	6
270mm	SS10C270H	10	FF10C270HX	6
300mm	SS10C300H	10	FF10C300HX	6
350mm	SS10C350H1	10	FF10C350HX	6
400mm	SS10C400H1	10	FF10C400HX	6
450mm	SS10C450H1	10	FF10C450HX	6
500mm	SS10C500H1	10	FF10C500HX	6
550mm	SS10C550H1	10	FF10C550HX	6
600mm	SS10C600H1	10	FF10C600HX	6

2		Locking Pin
		Dark Grey(H11)
Item No.		SJS01

3		Rod for Push-open Synchronization /For cutting to size,1100mm.Cutting:Internal cabinet width LW-172
Item No.		HT0FH02

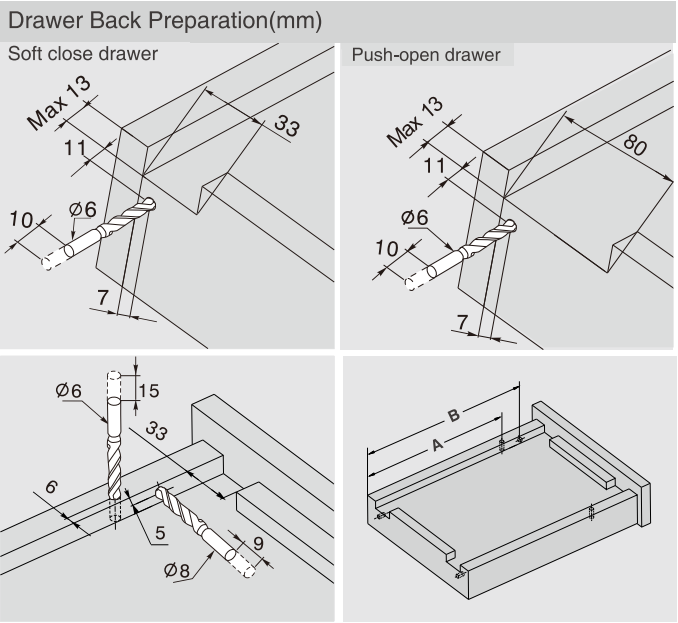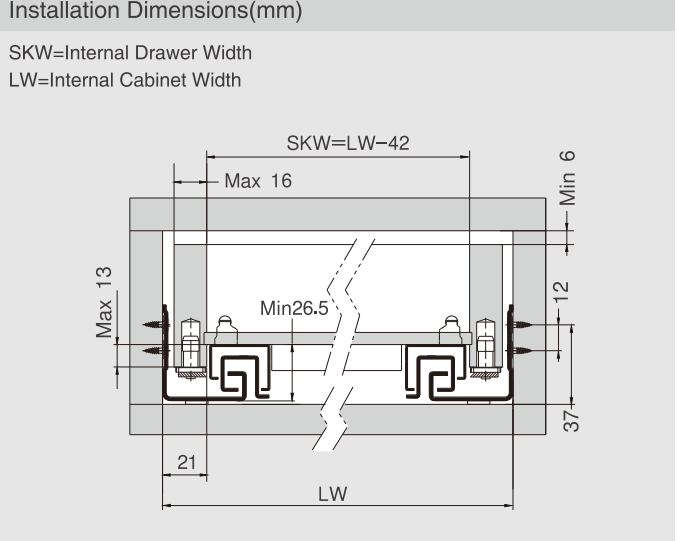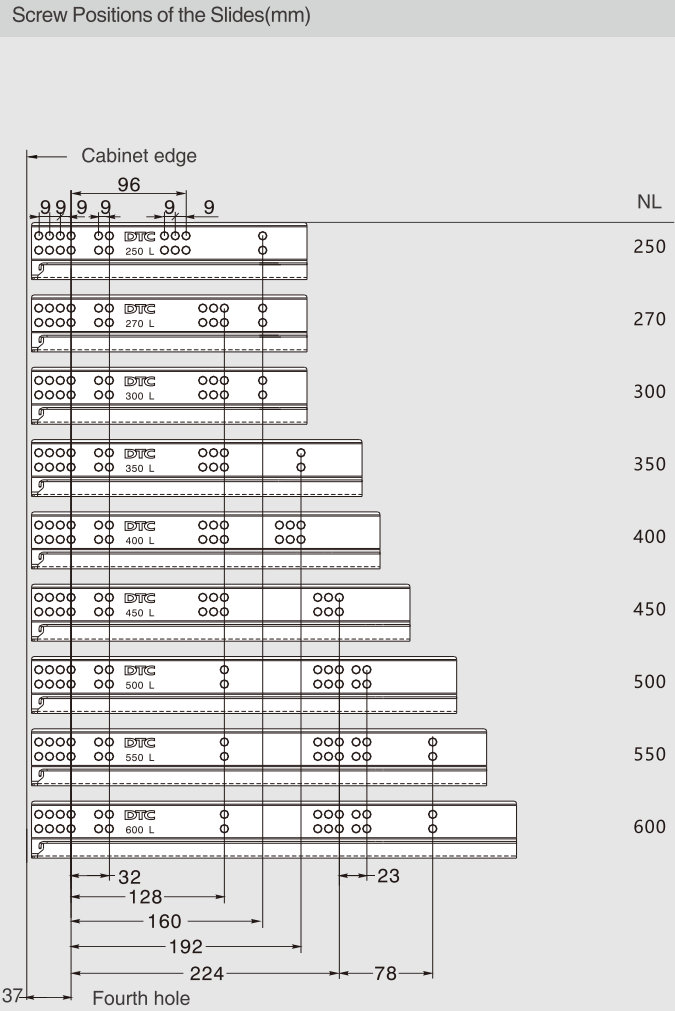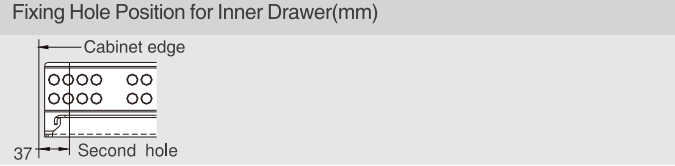
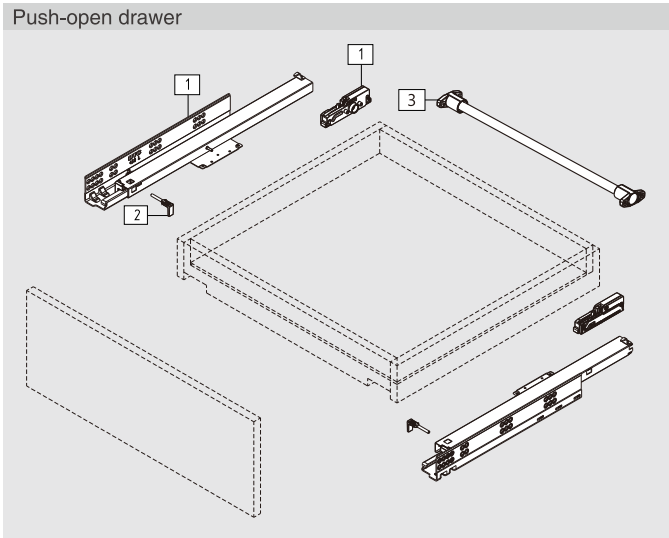
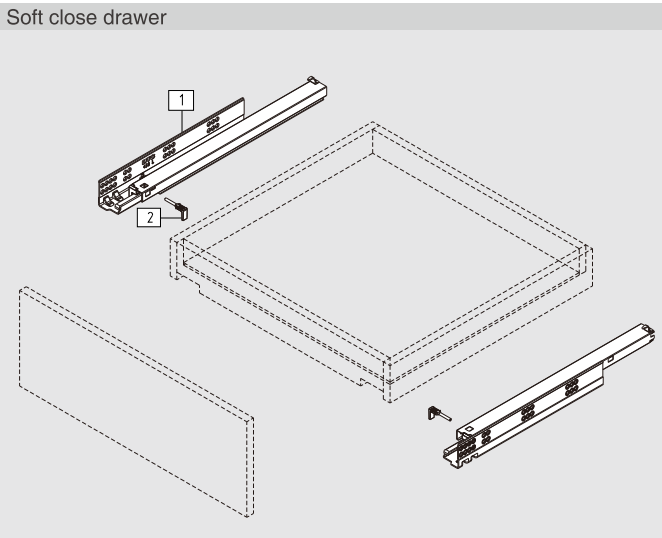


NL (mm)	250	270	300	350	400	450	500	550	600
A (mm)	190	205	245	270	305	330	355	390	415
B (mm)	200.5	215.5	255.5	280.5	319.5	369.5	419.5	469.5	519.5



-
- Diagram illustrating the dimensions of a rectangular box. The box is shown in a 3D perspective view. The length of the box is labeled as NL (Nominal Length). The width of the box is labeled as 100mm. The box is shown with dashed lines indicating its internal structure and the dimensions are labeled with arrows pointing to the corresponding edges.

1	Slides (left/right)																																																		
	Pre-zinc Steel (F02) <table> <tr> <th data-bbox="278 987 347 1024">NL</th><th data-bbox="347 987 471 1024"> Soft Close item No. </th><th data-bbox="471 987 540 1024">Set/ctn</th><th data-bbox="540 987 670 1024"> Push-open item No. </th><th data-bbox="670 987 718 1024">Set/ctn</th></tr> <tr> <td data-bbox="278 1024 347 1056">250mm</td><td data-bbox="347 1024 471 1056">SS80C250H</td><td data-bbox="471 1024 540 1056">10</td><td data-bbox="540 1024 670 1056">FF80C250HX</td><td data-bbox="670 1024 718 1056">6</td></tr> <tr> <td data-bbox="278 1056 347 1087">270mm</td><td data-bbox="347 1056 471 1087">SS80C270H</td><td data-bbox="471 1056 540 1087">10</td><td data-bbox="540 1056 670 1087">FF80C270HX</td><td data-bbox="670 1056 718 1087">6</td></tr> <tr> <td data-bbox="278 1087 347 1119">300mm</td><td data-bbox="347 1087 471 1119">SS80C300H</td><td data-bbox="471 1087 540 1119">10</td><td data-bbox="540 1087 670 1119">FF80C300HX</td><td data-bbox="670 1087 718 1119">6</td></tr> <tr> <td data-bbox="278 1119 347 1150">350mm</td><td data-bbox="347 1119 471 1150">SS80C350H1</td><td data-bbox="471 1119 540 1150">10</td><td data-bbox="540 1119 670 1150">FF80C350HX</td><td data-bbox="670 1119 718 1150">6</td></tr> <tr> <td data-bbox="278 1150 347 1182">400mm</td><td data-bbox="347 1150 471 1182">SS80C400H1</td><td data-bbox="471 1150 540 1182">10</td><td data-bbox="540 1150 670 1182">FF80C400HX</td><td data-bbox="670 1150 718 1182">6</td></tr> <tr> <td data-bbox="278 1182 347 1213">450mm</td><td data-bbox="347 1182 471 1213">SS80C450H1</td><td data-bbox="471 1182 540 1213">10</td><td data-bbox="540 1182 670 1213">FF80C450HX</td><td data-bbox="670 1182 718 1213">6</td></tr> <tr> <td data-bbox="278 1213 347 1245">500mm</td><td data-bbox="347 1213 471 1245">SS80C500H1</td><td data-bbox="471 1213 540 1245">10</td><td data-bbox="540 1213 670 1245">FF80C500HX</td><td data-bbox="670 1213 718 1245">6</td></tr> <tr> <td data-bbox="278 1245 347 1276">550mm</td><td data-bbox="347 1245 471 1276">SS80C550H1</td><td data-bbox="471 1245 540 1276">10</td><td data-bbox="540 1245 670 1276">FF80C550HX</td><td data-bbox="670 1245 718 1276">6</td></tr> <tr> <td data-bbox="278 1276 347 1306">600mm</td><td data-bbox="347 1276 471 1306">SS80C600H1</td><td data-bbox="471 1276 540 1306">10</td><td data-bbox="540 1276 670 1306">FF80C600HX</td><td data-bbox="670 1276 718 1306">6</td></tr> </table>	NL	Soft Close item No.	Set/ctn	Push-open item No.	Set/ctn	250mm	SS80C250H	10	FF80C250HX	6	270mm	SS80C270H	10	FF80C270HX	6	300mm	SS80C300H	10	FF80C300HX	6	350mm	SS80C350H1	10	FF80C350HX	6	400mm	SS80C400H1	10	FF80C400HX	6	450mm	SS80C450H1	10	FF80C450HX	6	500mm	SS80C500H1	10	FF80C500HX	6	550mm	SS80C550H1	10	FF80C550HX	6	600mm	SS80C600H1	10	FF80C600HX	6
NL	Soft Close item No.	Set/ctn	Push-open item No.	Set/ctn																																															
250mm	SS80C250H	10	FF80C250HX	6																																															
270mm	SS80C270H	10	FF80C270HX	6																																															
300mm	SS80C300H	10	FF80C300HX	6																																															
350mm	SS80C350H1	10	FF80C350HX	6																																															
400mm	SS80C400H1	10	FF80C400HX	6																																															
450mm	SS80C450H1	10	FF80C450HX	6																																															
500mm	SS80C500H1	10	FF80C500HX	6																																															
550mm	SS80C550H1	10	FF80C550HX	6																																															
600mm	SS80C600H1	10	FF80C600HX	6																																															

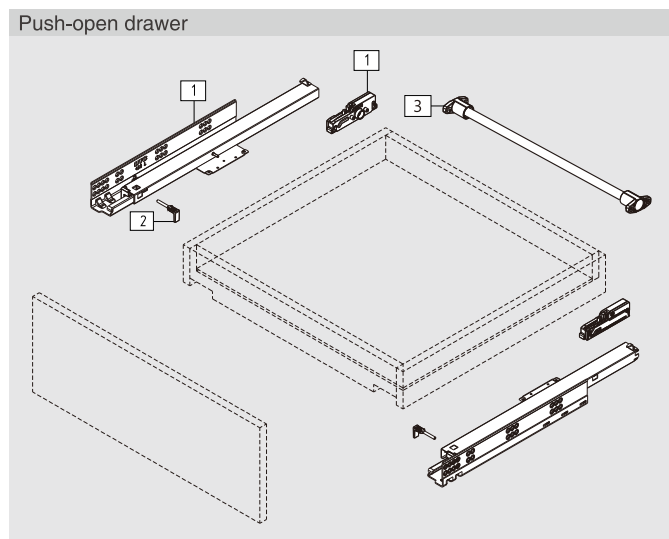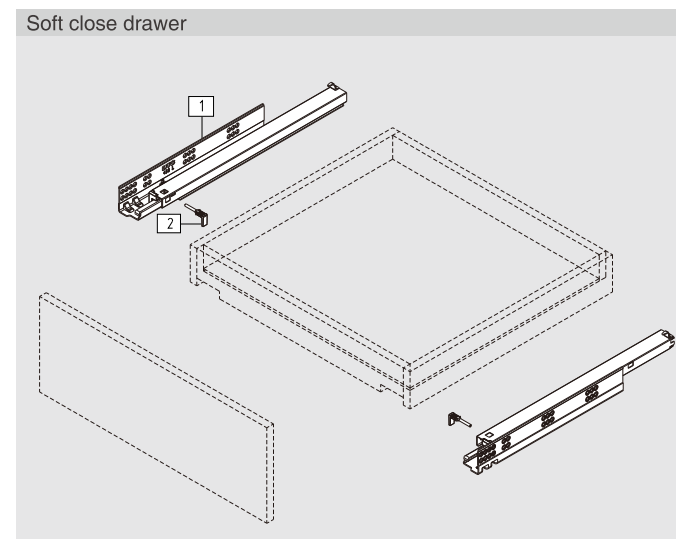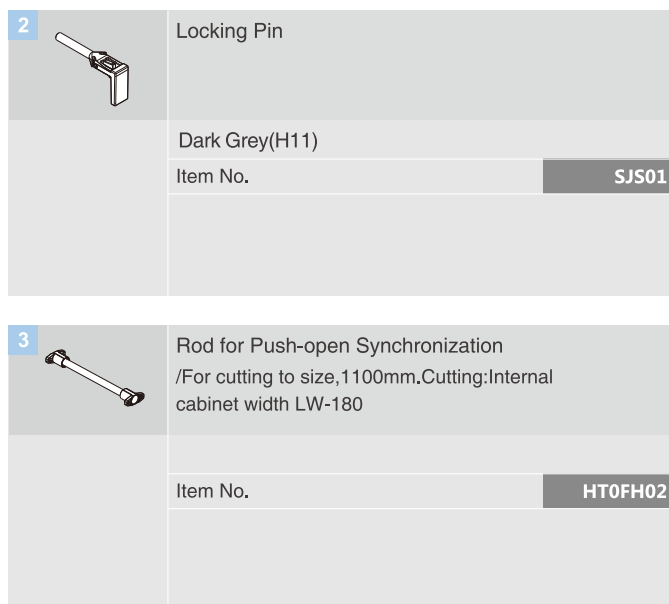

Installation Dimensions(mm)

NL=Nominal Slide Length LT=Internal Cabinet Depth LT=NL+3

Standard drawer

Fixing Hole Position for Inner Drawer(mm)

Screw Positions of the Slides(mm)

NL	250	270	300	350	400	450	500	550	600
Cabinet edge	96	96	96	96	96	96	96	96	96
9	9	9	9	9	9	9	9	9	9
32	128	160	192	224	78				
37									
Fourth hole									

NL=Nominal Slide Length LT=Internal Cabinet Depth LT=NL+21

Inner drawer

Installation Dimensions(mm)

SKW=Internal Drawer Width
LW=Internal Cabinet Width

Drawer Back Preparation(mm)

Soft close drawer

Push-open drawer

NL (mm)	250	270	300	350	400	450	500	550	600
A (mm)	190	205	245	270	305	330	355	390	415
B (mm)	200.5	215.5	255.5	280.5	319.5	369.5	419.5	469.5	519.5

ASSEMBLY AND ADJUSTMENT

Assembly and Adjustment
(for D-MOTION Full Extension Undermount Slides)



Drawer Assembly with Peg


Fix the slide onto the cabinet.

Pull out the drawer member of the slide from the cabinet, lay the drawer onto the slide.

Press the locking pin into the drawer side to lock the position of the drawer.

Removal with Peg

For removal, pull out the locking pin from the drawer side. Lift the drawer and pull it out from the cabinet.

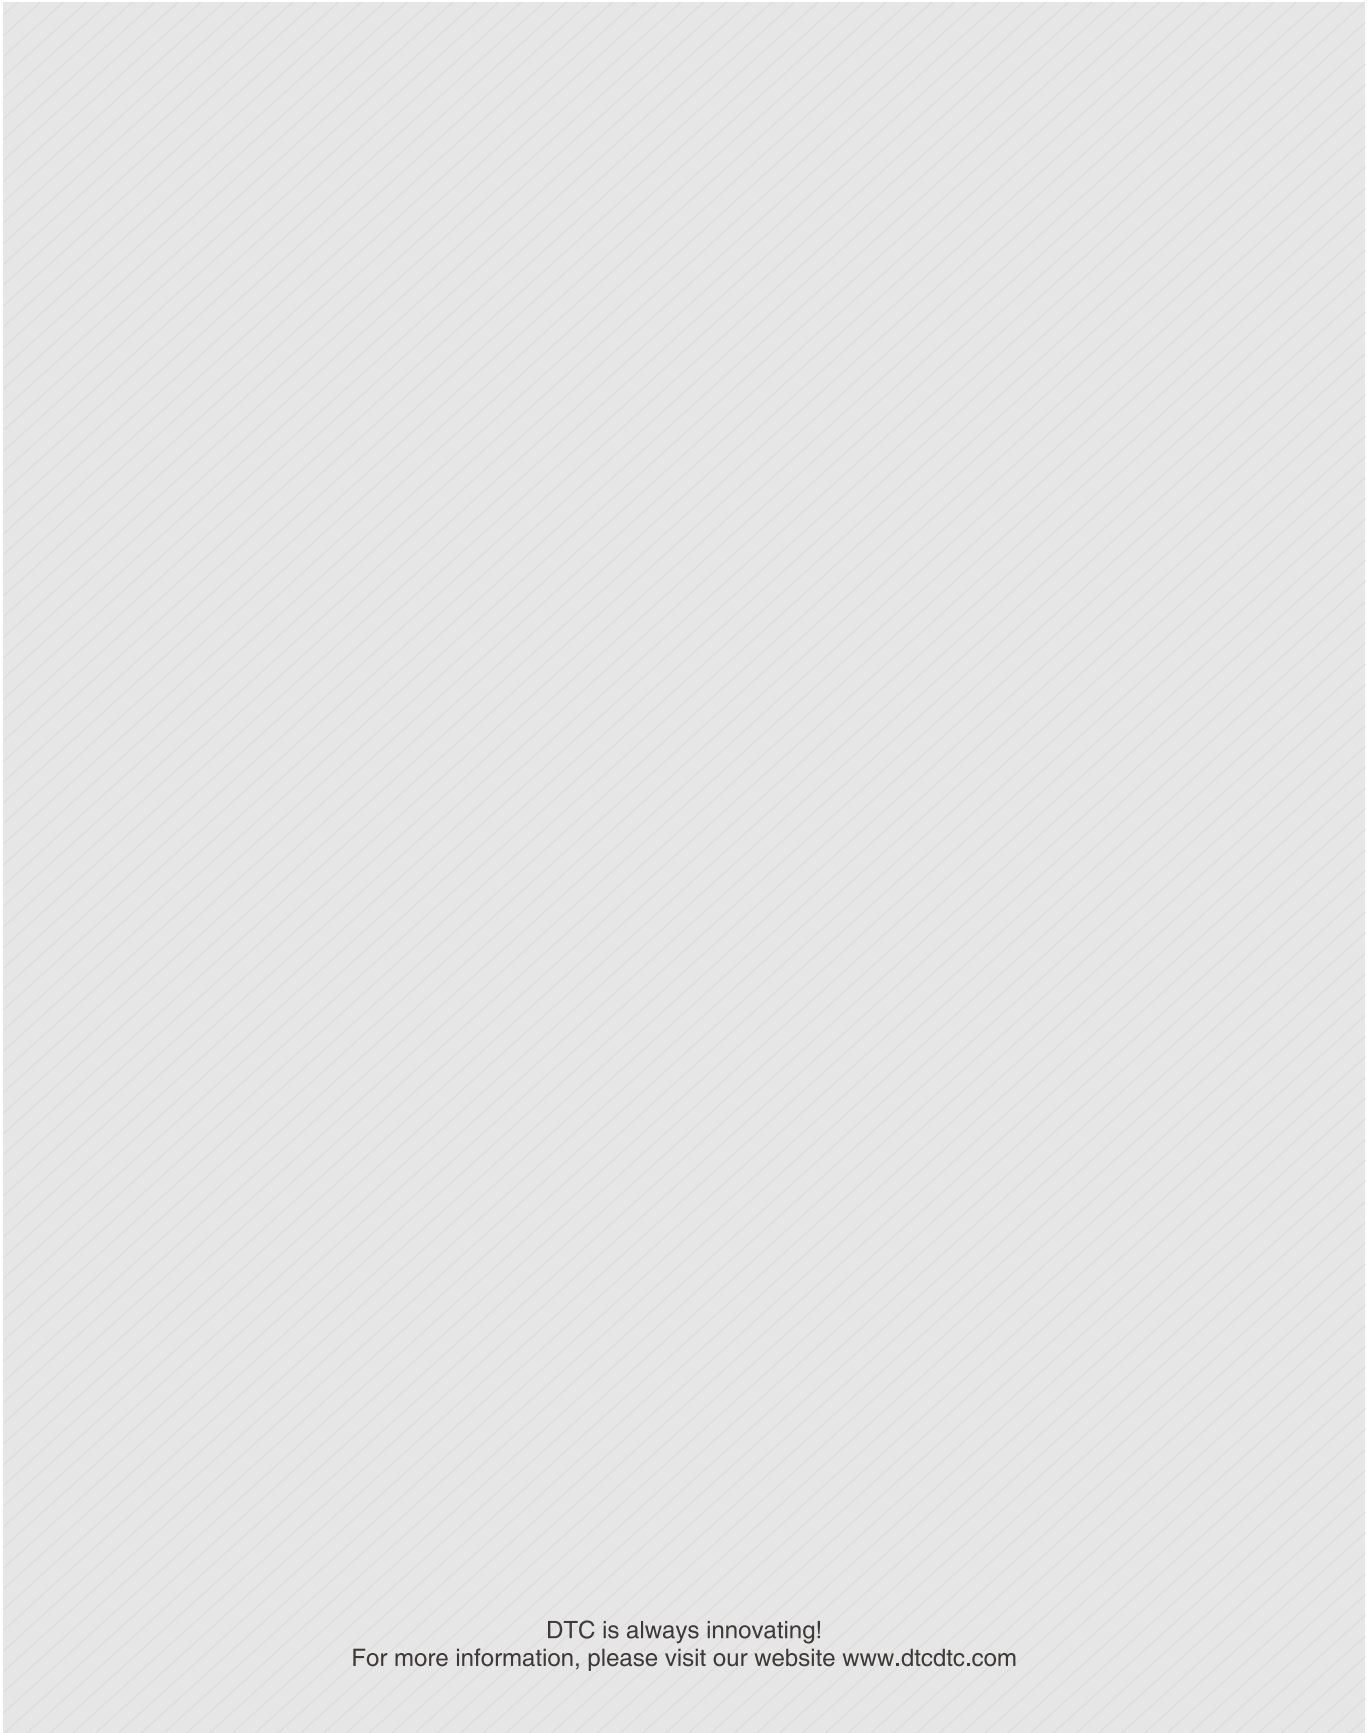

DTC is always innovating!
For more information, please visit our website www.dtcetc.com

D-MOTION

Shelf Locking Device(For Full Extension Undermount Slides 16mm with Locking Device)




PRODUCT




DESCRIPTION

- For TS Series/DS Series/SS Series full extension undermount slides 16mm with locking device
- Two-sided locking mechanism
- Tool free assembly and removal
- Pull out the shelf can be released with one hand thanks to synchronisation rod
- Cabinet width up to 1200mm




SPACE REQUIREMENT

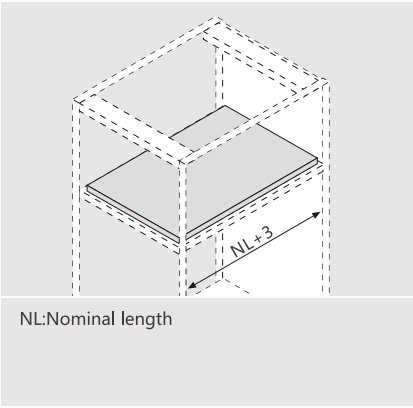

PLANNING

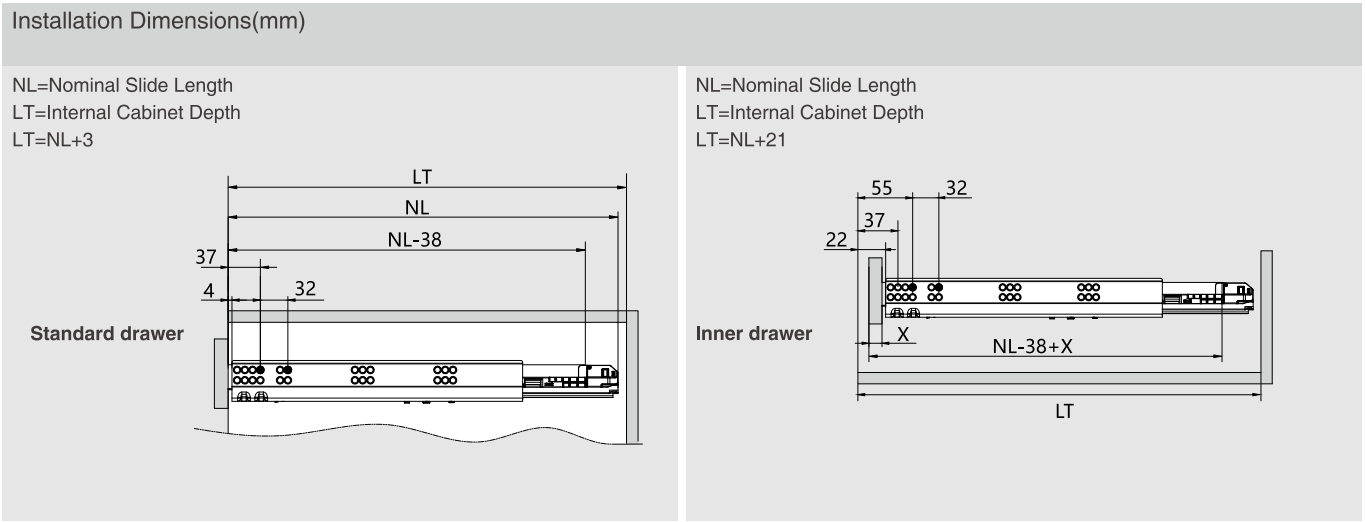

1	Shelf Locking Device
	Dark Grey(H11)
Item No.	OSSDW01
2	Synchronization Rod (Size:1100mm.Cutting:Internal cabinet width LW-53)
	Silver white(F98)
Item No.	HT10075

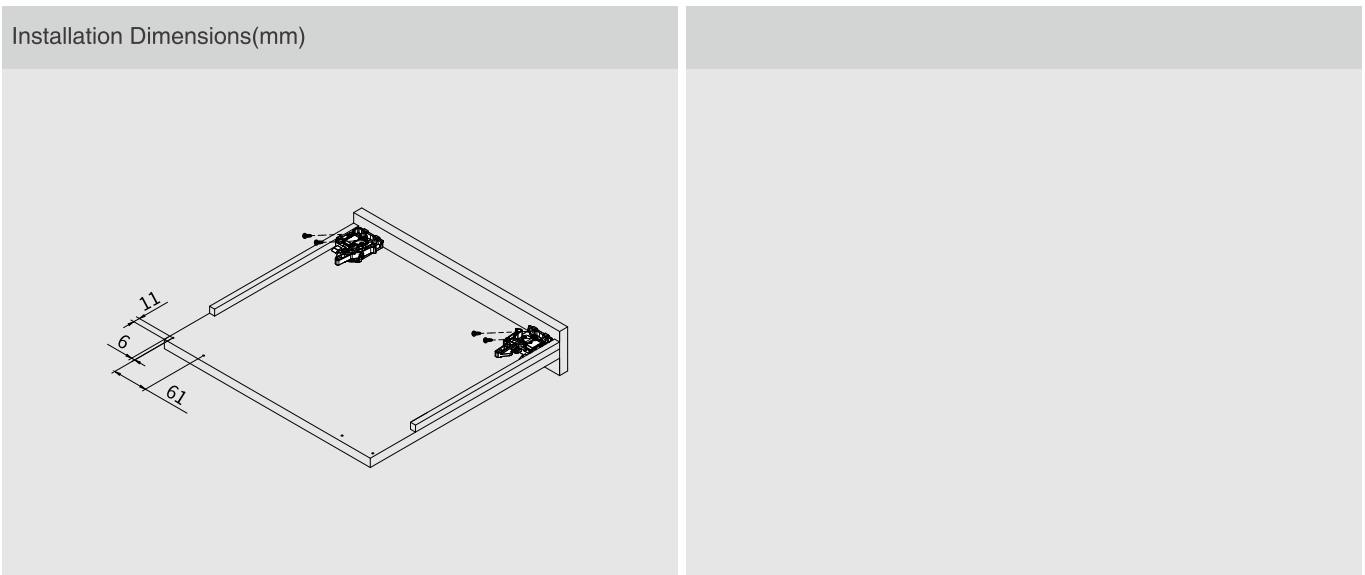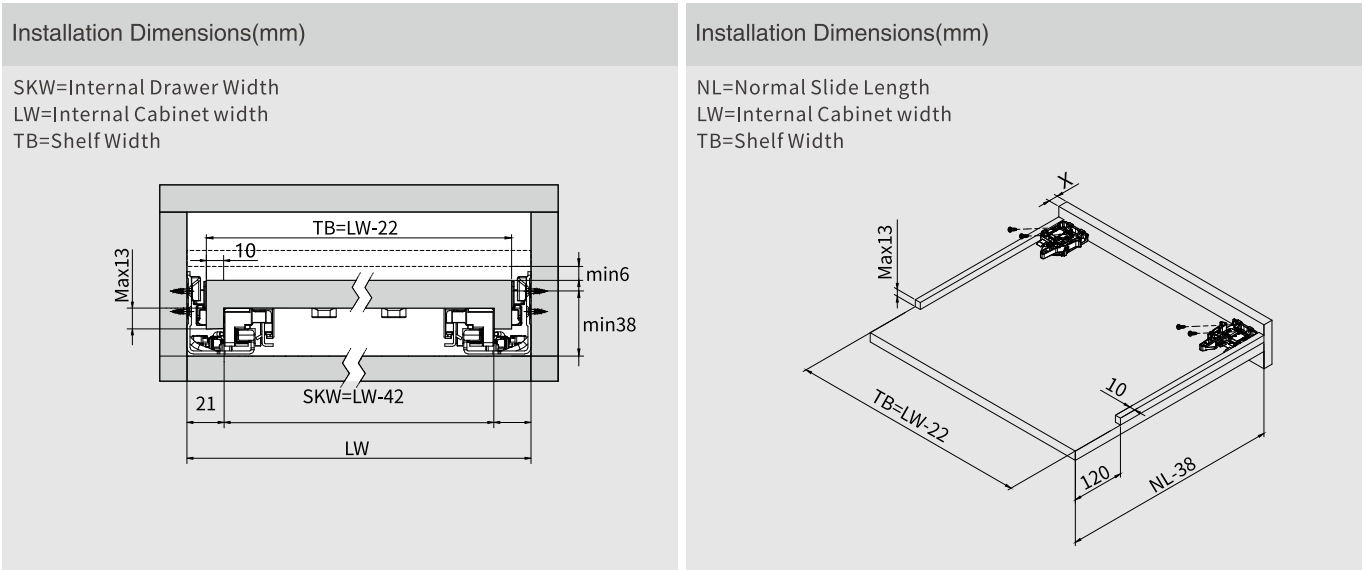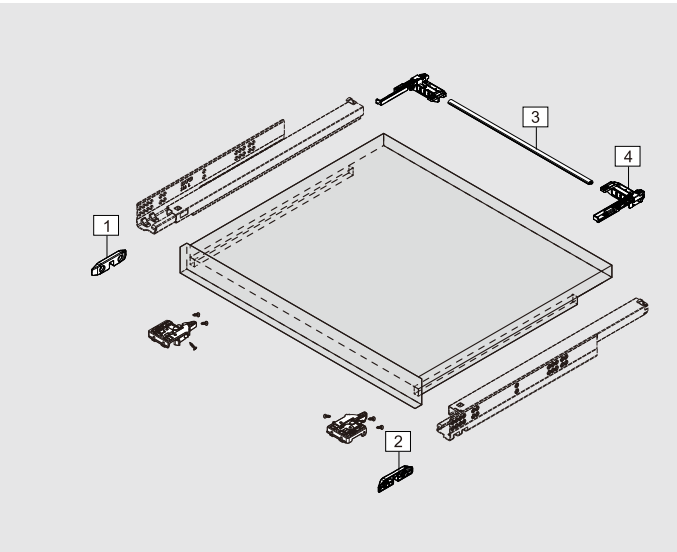

D-MOTION

Shelf Locking Device(For Full Extension Undermount Slides 19mm with Locking Device)




PRODUCT




DESCRIPTION

- For TS Series/DS Series/SS Series full extension undermount slides 19mm with locking device
- Two-sided locking mechanism
- Tool free assembly and removal
- Pull out the shelf lock can be released with one hand thanks to synchronisation rod
- Cabinet width up to 1200mm




SPACE REQUIREMENT



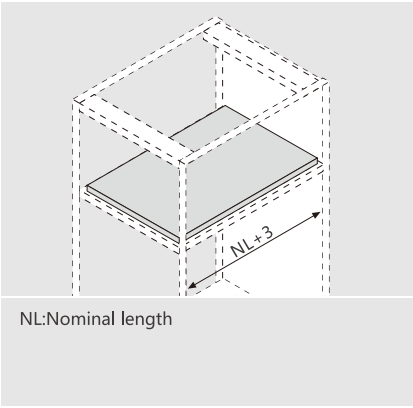


PLANNING

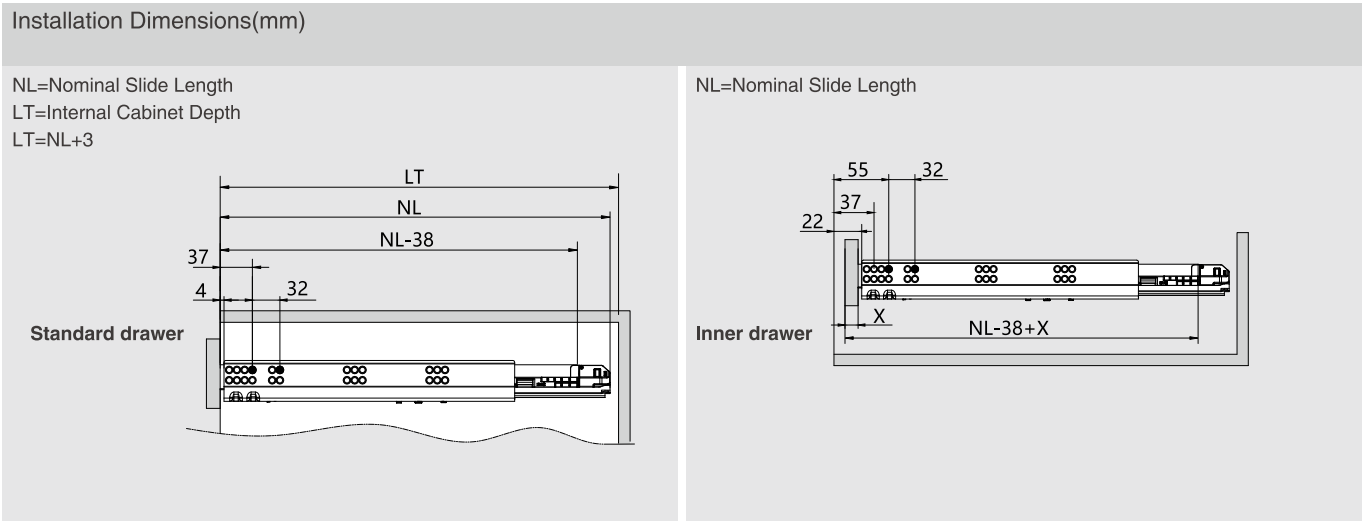


1	Shelf Locking Device
	Dark Grey(H11)
	Item No. OSSDW02
2	Synchronization Rod (Size:1100mm.Cutting:Internal cabinet width LW-53)
	Silver white(F98)
	Item No. HT10075

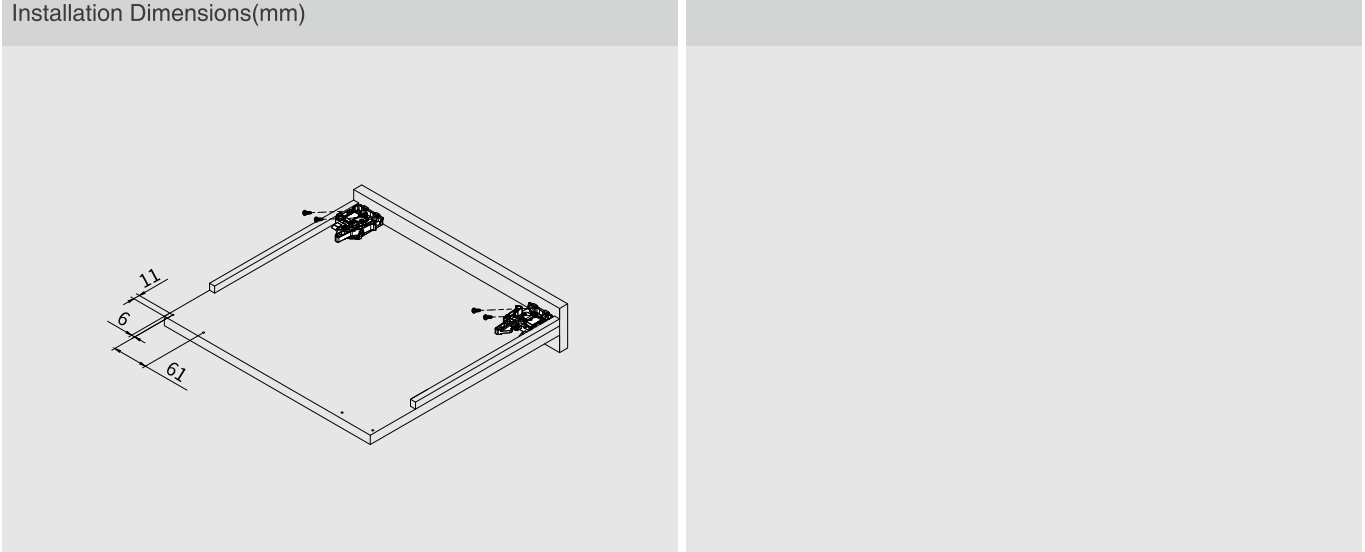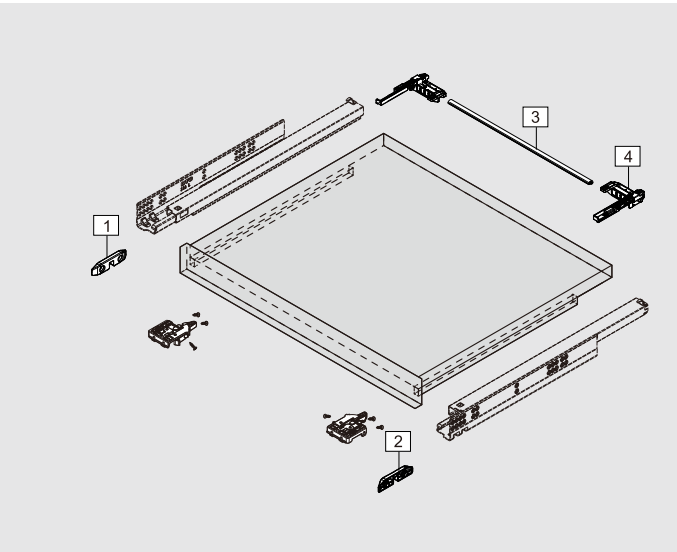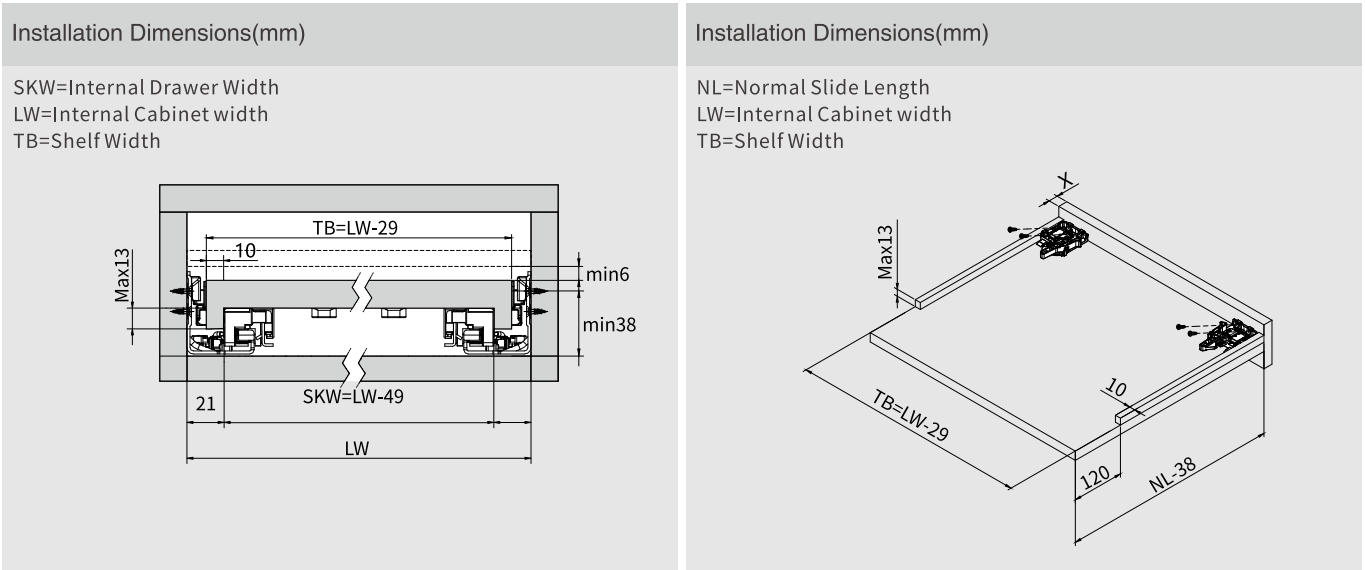

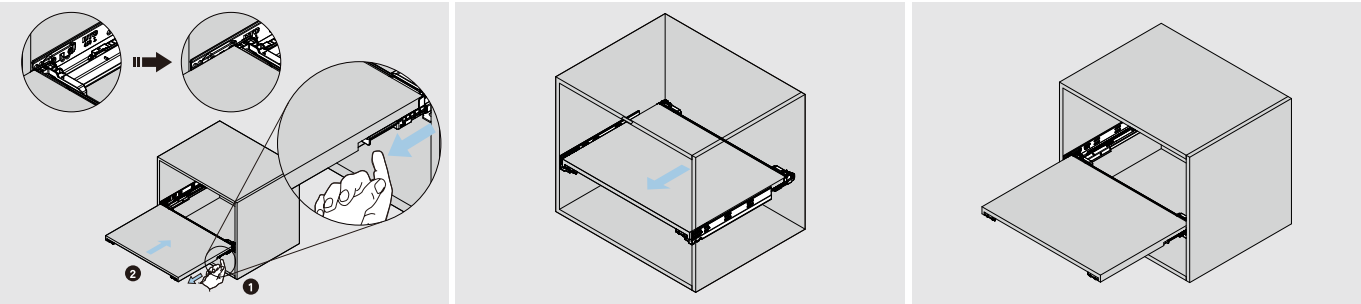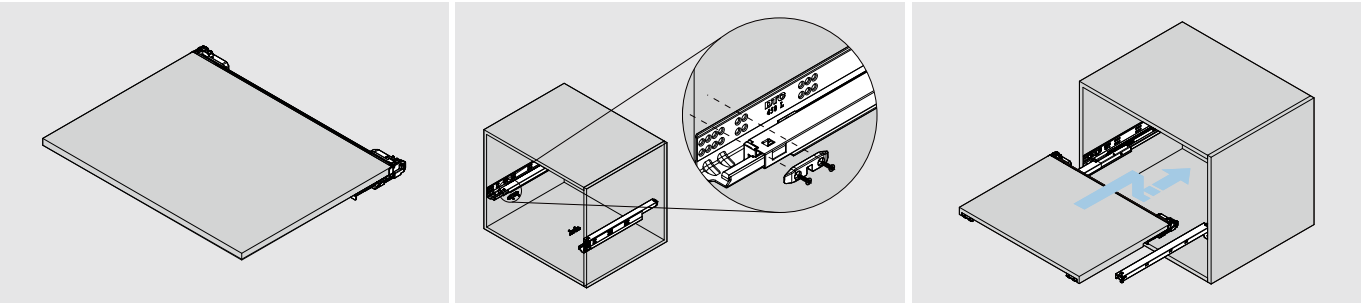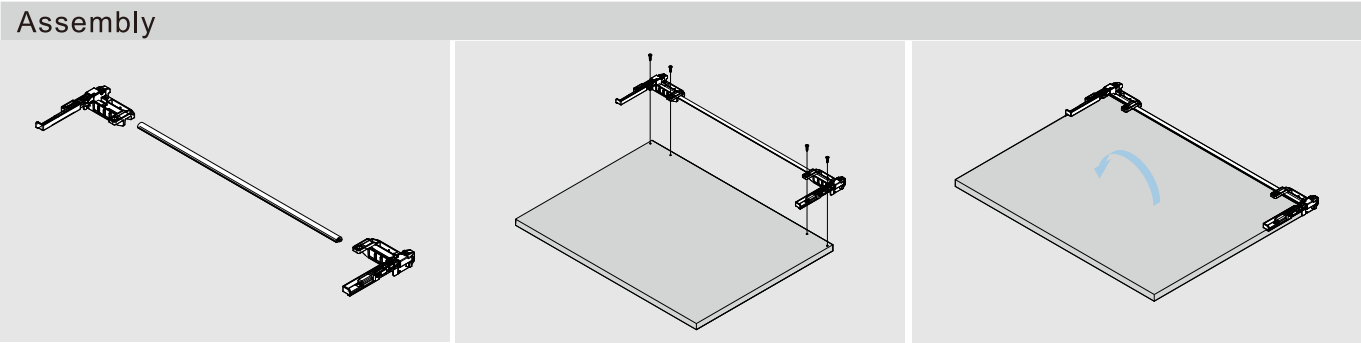

Hold the handle and push in the shelf

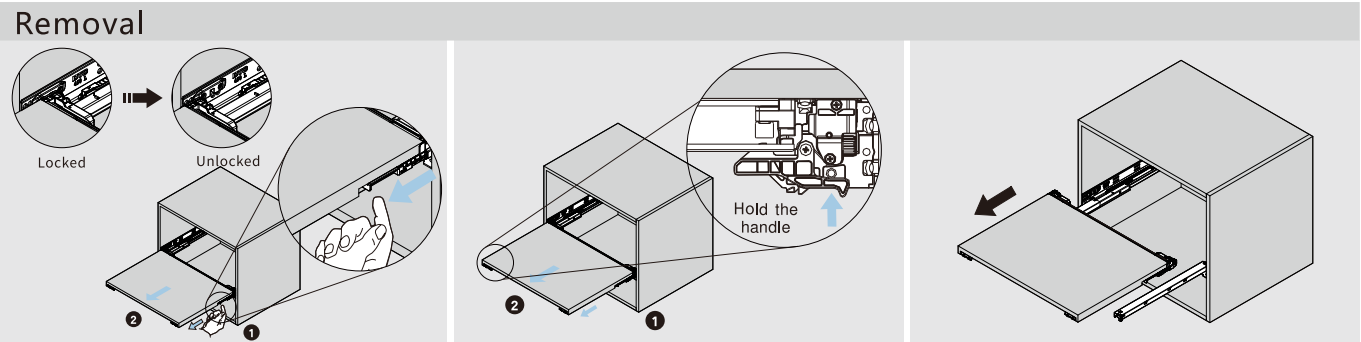

Hold the handle and pull out the shelf.

For removal, Hold the handle and pull out the shelf.

DTC is always innovating!
For more information, please visit our website www.dtc.dtc.com