


- High grade stainless steel
- Load rating up to 65kg
- 100% extension
- 19.1mm slide thickness
- Hold-in
- Ideal for environments where mild steel might be subject to corrosion

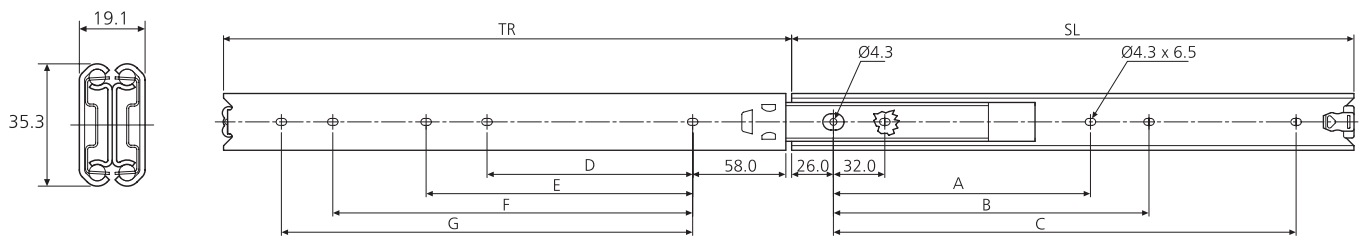

0330	mm								
	SL	TR	A	B	C	D	E	F	G
DS0330-0030	300	304.5	-	192	224	-	-	192	224
DS0330-0035	350	354.0	-	224	256	-	-	224	256
DS0330-0040	400	403.0	-	192	320	160	-	288	320
DS0330-0045	450	452.0	-	224	352	192	-	320	352
DS0330-0050	500	501.0	256	288	416	224	256	384	416
DS0330-0055	550	550.5	288	320	480	256	288	416	448
DS0330-0060	600	600.0	320	352	512	288	320	480	512
DS0330-0070	700	698.0	352	384	608	320	352	576	608

Notes:

- Fixing recommendation: M4