


Wooden fronts, wide and narrow alu frames

Web code
DQDB2M

Planning

Drilling position

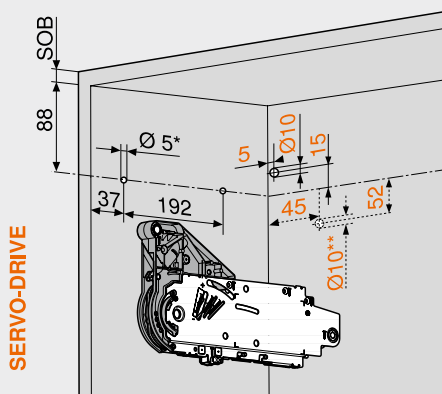

5 x chipboard screws Ø 4 x 35 mm


Drilling for SERVO-DRIVE distribution cable, left only

SOB	Top panel thickness
-----	---------------------

*	Drilling depth 5 mm
---	---------------------

Alternative drilling

Space requirement

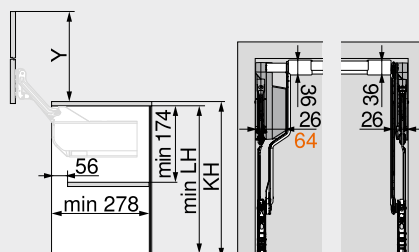


SERVO-DRIVE

Lever arm set		LH min.	Y (mm) ¹
Standard	SERVO-DRIVE	(mm) ¹	
20L3200.06	21L3200.01	262.0	264.0
20L3500.06	21L3500.01	312.0	352.0
20L3800.06	21L3800.01	362.0	440.0
20L3900.06	21L3900.01	412.0	529.0

¹ Dimensions based on lower gap F = 0 mm

LH	Internal cabinet height
----	-------------------------

LH	Internal cabinet
KH	Cabinet height

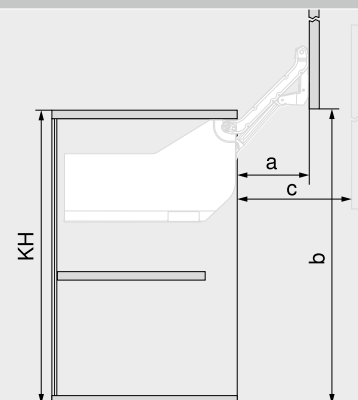


Lever arm set		a (mm)	b (mm) ¹	c max. (mm)
Standard	SERVO-DRIVE			
20L3200.06	21L3200.01	114.0	257.0	159.0
20L3500.06	21L3500.01	146.0	345.0	209.0
20L3800.06	21L3800.01	178.0	433.0	259.0
20L3900.06	21L3900.01	210.0	522.0	309.5

¹ Dimensions based on lower gap F = 0 mm

KH	Cabinet height
----	----------------

Front assembly – wooden fronts and wide alu frames

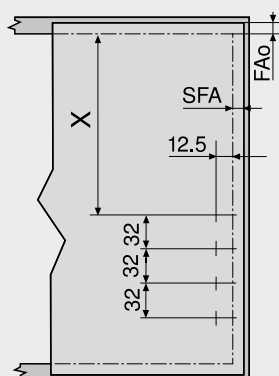


Lever arm set		X (mm)
Standard	SERVO-DRIVE	
20L3200.06	21L3200.01	153
20L3500.06	21L3500.01	203
20L3800.06	21L3800.01	253
20L3900.06	21L3900.01	303

FAo	Upper front overlay
-----	---------------------

SFA	Front overlay of the side panel
-----	---------------------------------

Wall application: min. gap required 5 mm

Front assembly – narrow alu frames

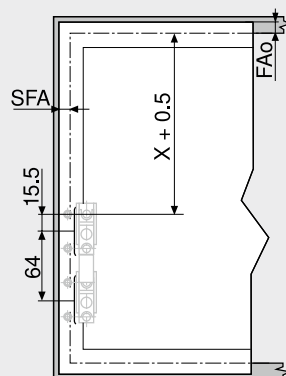


Lever arm set		X (mm)
Standard	SERVO-DRIVE	
20L3200.06	21L3200.01	153
20L3500.06	21L3500.01	203
20L3800.06	21L3800.01	253
20L3900.06	21L3900.01	303

FAo	Upper front overlay
-----	---------------------

SFA	Front overlay of the side panel
-----	---------------------------------


Wall application: min. gap required 5 mm

Narrow alu frames

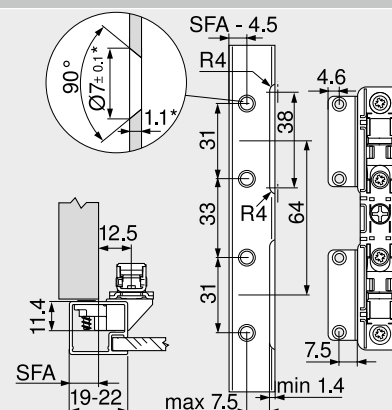

For frame width 19 mm, a side front overlay SFA of 11–18 mm is possible

* When changing material thickness, adjust the assembly dimensions accordingly

Space requirement – cornice | crown

Top panel thickness SOB (mm)	X (mm)
16	28
18	30
19	31

Connecting piece

