

KINVARO


S-35 up-and-over flap fitting



- Allows the use of cornices, pelmets and attached lights
- Suitable for handle-free fronts
- Integrated adjustable damping system enables quiet, gentle closing
- Flap 3-dimensionally adjustable – height, side, angle: direct adjustment ± 1.5 mm
- Fast, tool-free installation
- Securely holds flap in any position from 45° opening angle
- Range of flaps:
width: 450 – 1200 mm
height: 420 – 750 mm

• Note:


With new cover cap design
Colour similar to RAL 7045

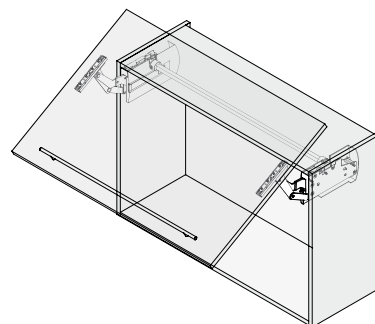

APPLICATION RANGE

Flap height	Flap weight incl. handle (kg)				
	Spring A	Spring B	Spring C	Spring D	Spring E
420 – 449	1.5 – 7.5	5.0 – 11.0	-	-	-
450 – 479	1.8 – 7.5	5.0 – 12.0	-	-	-
480 – 509	1.8 – 6.5	5.0 – 12.5	-	-	-
510 – 539	2.0 – 6.0	5.0 – 13.0	-	-	-
540 – 569	2.0 – 6.0	5.0 – 12.5	6.0 – 14.0	-	-
570 – 599	2.0 – 6.0	5.0 – 11.0	5.5 – 12.0	11.5 – 14.5	-
600 – 629	2.0 – 5.5	4.5 – 10.0	5.5 – 11.5	10.5 – 15.5	-
630 – 659	2.0 – 5.5	-	4.5 – 11.0	8.5 – 16.0	-
660 – 689	2.0 – 5.0	-	4.0 – 10.0	7.5 – 15.0	12.0 – 16.5
690 – 719	2.0 – 5.0	-	4.0 – 8.5	6.5 – 13.5	12.0 – 17.5
720 – 750	-	-	4.0 – 8.0	6.5 – 12.5	10.0 – 17.0


ORDER INFORMATION

Kinvaro S-35 set						
Flap height	Spring A	Spring B	Spring C	Spring D	Spring E	
420 – 750	F152000255	F152000256	F152000257	F152000258	F152000259	

Aluminium frame adapter, Kinvaro S-35 set			
Designation	Overlay	Item No.	
Aluminium frame adapter (2x) for narrow aluminium frames (19 mm) with fixing screws (16x)	13 – 17	F152145055	

Kinvaro S-35 set comprises:

- 1** Fitting, right and left (1x)
 - 2** Cover caps on right and left in grey, similar to RAL 7045 (1x)
 - 3** 1090 mm cross bar for cutting to length (1x)
 - 4** Sliding sleeves (2x)
 - 5** Mounting plates (2x)
- Paper template (1x)
Installation instructions (1x)

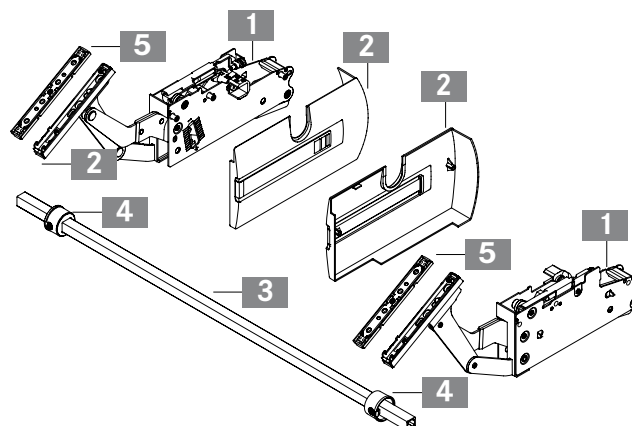

Installation technology	771
Kinvaro S-35 adjustment options	71